

PERFORMANCE CURVE


VOLUTE 38224-705 CURVE T8A-B-6
 IMPELLER 12349 MODEL T8A-B
 SIZE 8"X8" IMP.DIA. 13.25"
 SP.GR. 1.0 RPM NOTED

Note:
 Select performance within
 operating range of curve.

Consult factory on operating conditions
 above 1200 rpm when TDSL exceeds 20 ft.

		REPRIMING LIFTS									
RPM		650	750	850	950	1050	1150	1250	1350	1450	1550
FEET		5	7	9	11	12	13	15	17	19	20
METERS		1,5	2,1	2,7	3,4	3,7	4	4,6	5,2	5,8	6,1

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

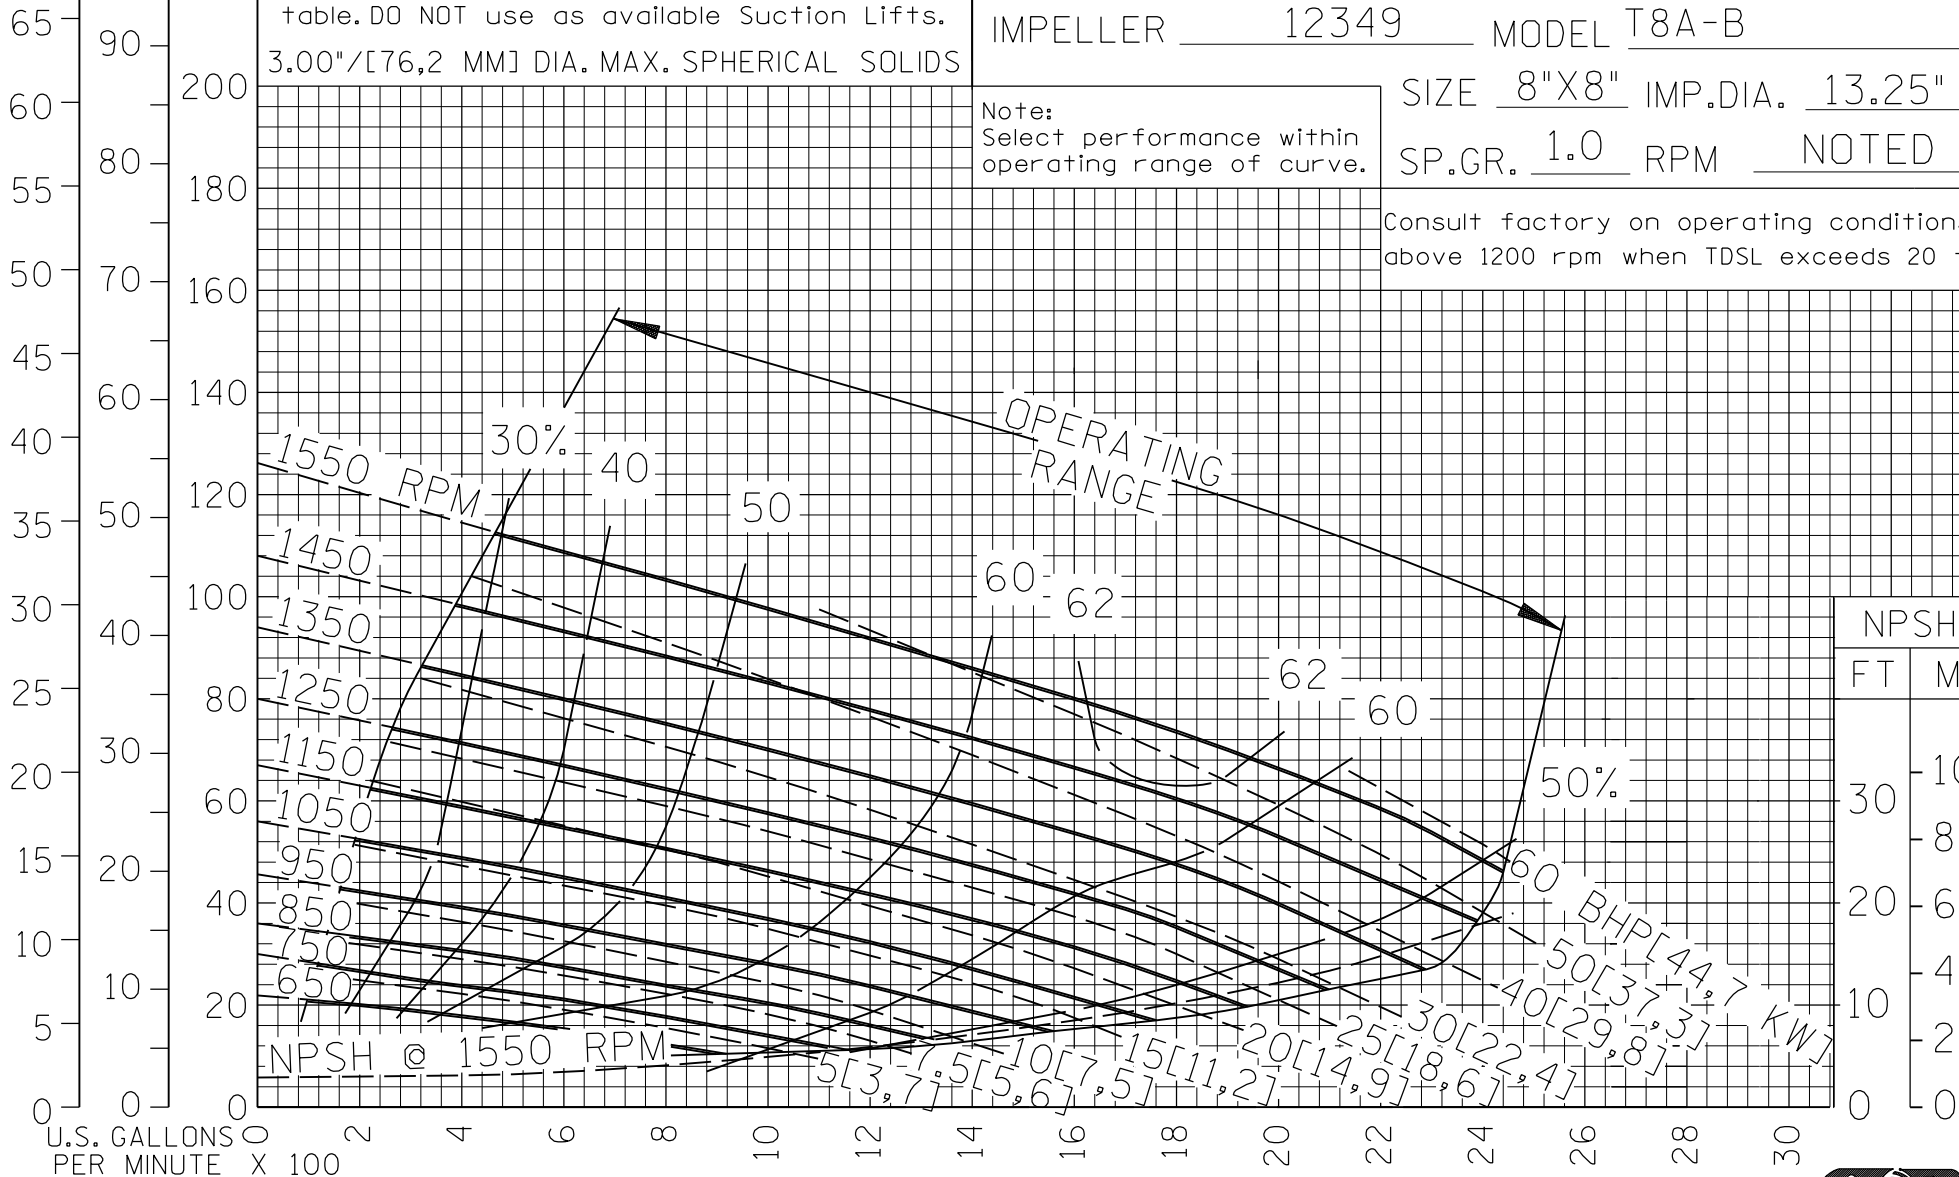

NPSH	
FT	M
30	10
20	6
10	3
0	0

FILE NO. t8ab.s06



T-5-99-R