

PERFORMANCE CURVE

REPRIMING LIFTS

DIA.	12.75"	13.25"	13.75"	14.25"
FEET	16	19	22	24
METERS	4,9	5,8	6,7	7,3

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

VOLUTE 38224-705 CURVE T8A-B-8


IMPELLER 12349 MODEL T8A-B

SIZE 8"X8" IMP.DIA. NOTED

SP.GR. 1.0 RPM 1450

Note:
Select performance within operating range of curve.

Consult factory on operating conditions above 1200 rpm when TDSL exceeds 20 ft.

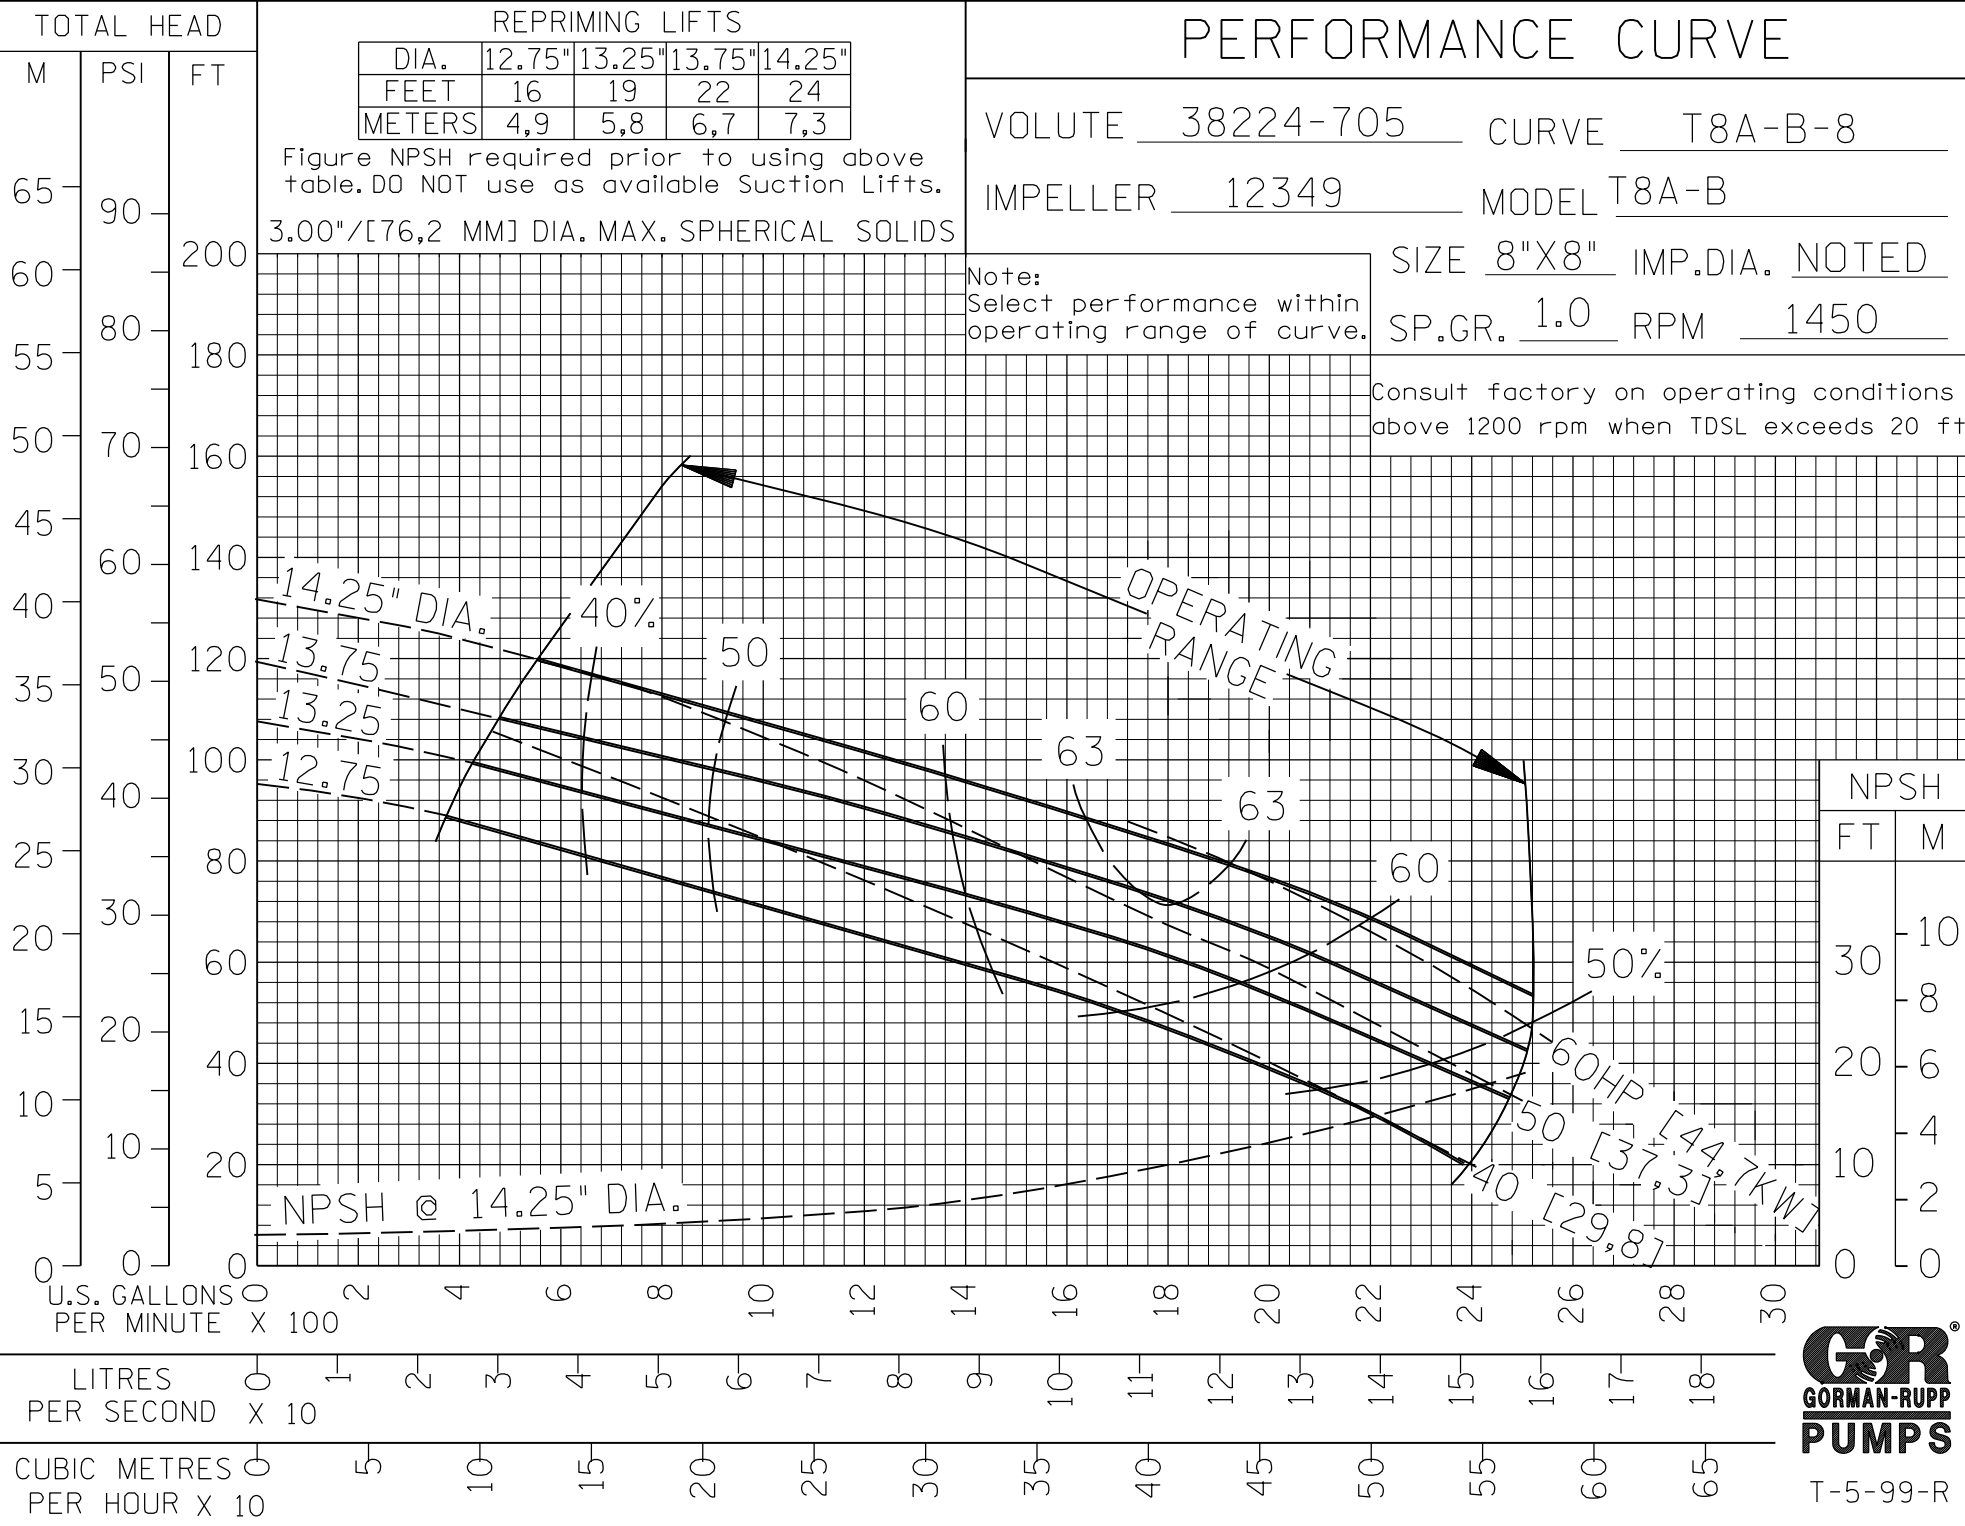

FILE NO. T8ab.s08



T-5-99-R