

TOTAL HEAD

M PSI FT

REPRIMING LIFTS			
RPM	12.75° - 13.25°	13.75° - 14.25°	14.75°
FEET	6	11	13
METERS	1.8	3.4	4.0

Figure NPSH required prior to using above table.  
DO NOT use as available Suction Lifts.

1.50"/[38,1 MM] DIA. MAX. SPHERICAL SOLIDS

# PERFORMANCE CURVE


VOLUTE 38224-705 CURVE T8ESC-B-1

IMPELLER 38614-859 MODEL T8ESC-B

Note:  
Select performance within  
operating range of curve.

SIZE 8"X8" IMP.DIA. NOTED

SP.GR. 1.0 RPM 850

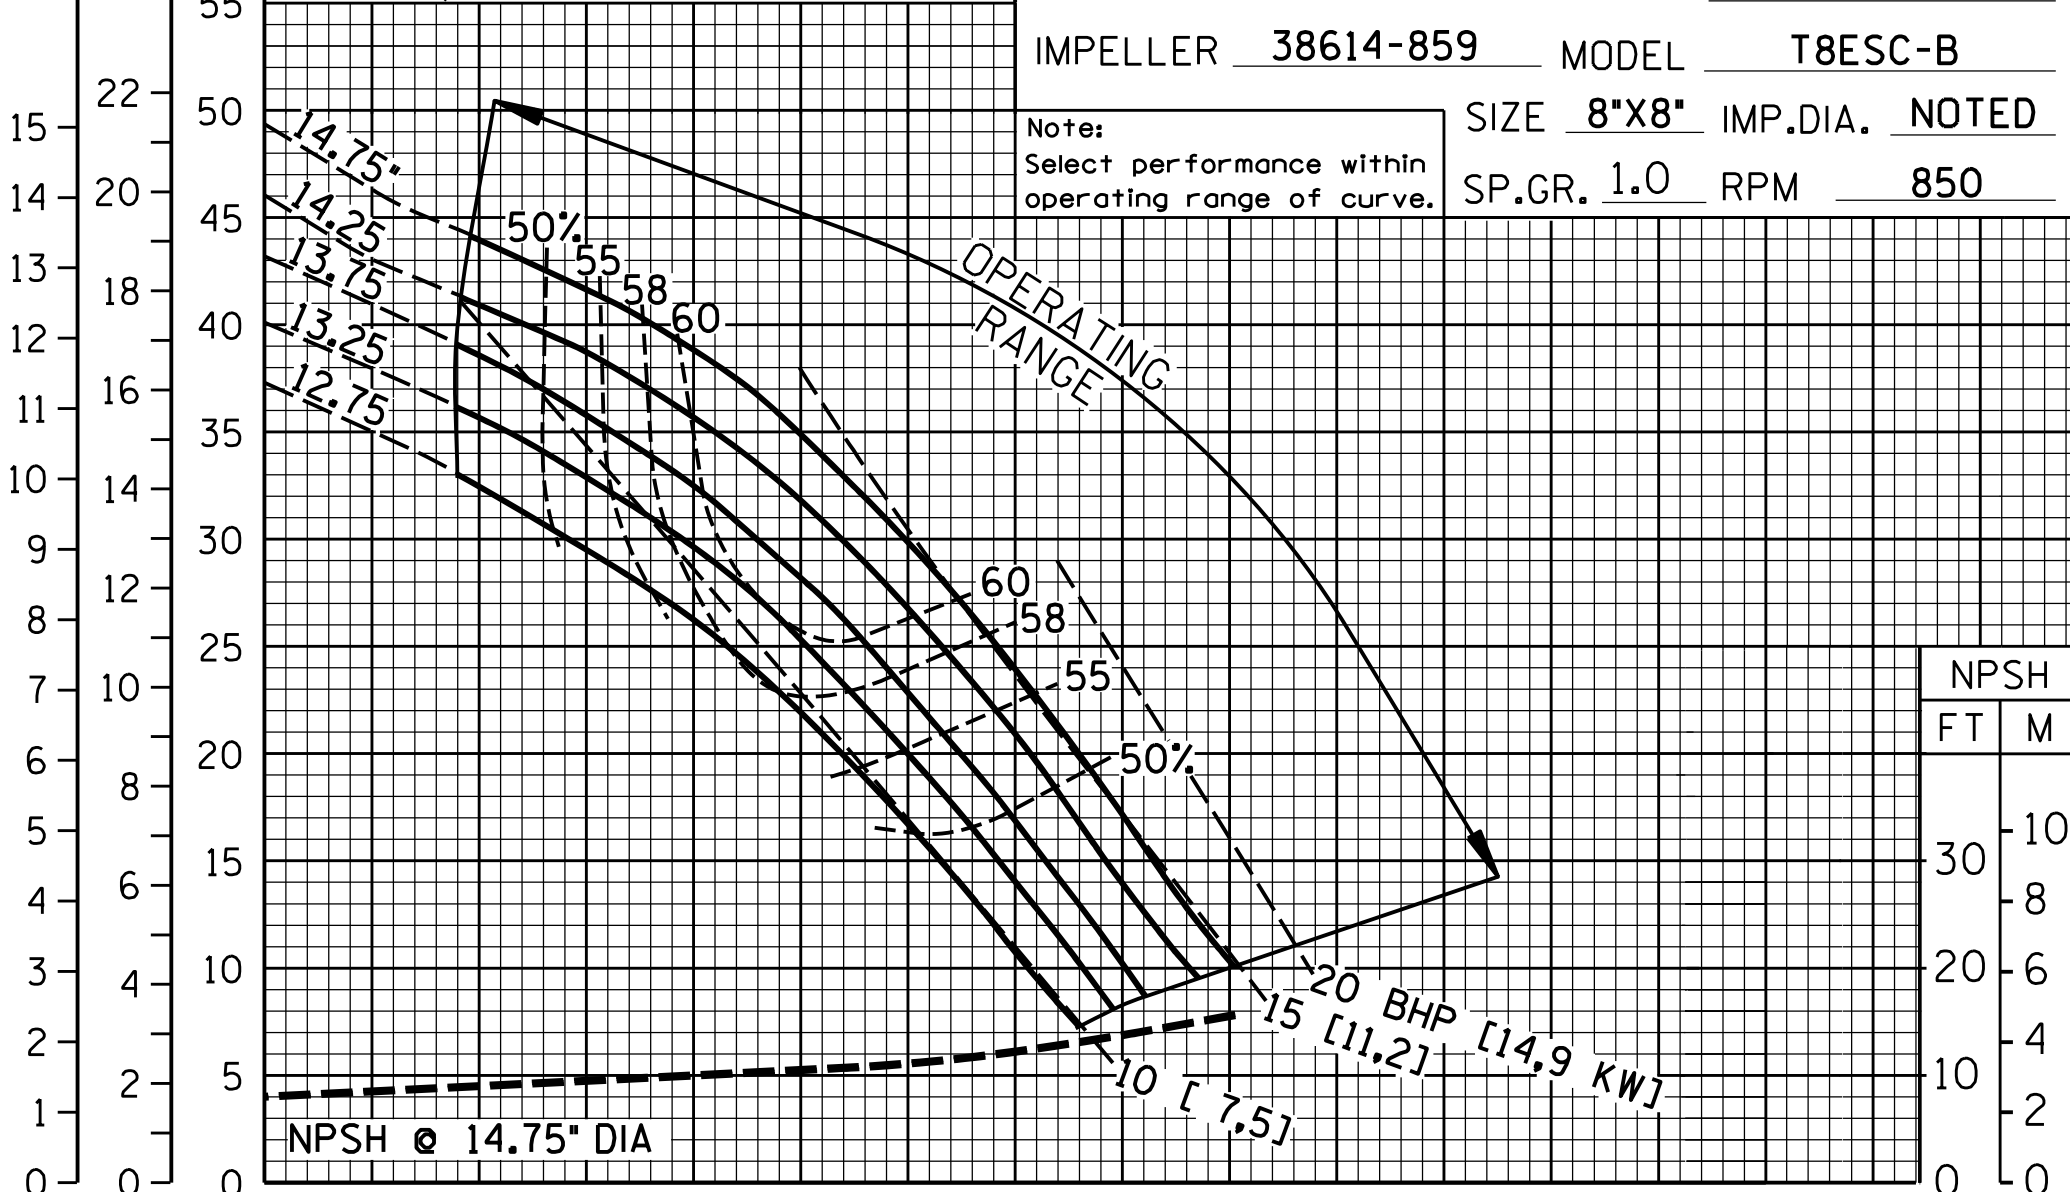

U.S. GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

NPSH FT M

