


TOTAL HEAD

250 MAX OPERATING PRESSURE  
SPECIFY PLUMBING ACCORDINGLY  
FOR DIRECT COUPLED DRIVE ONLY  
50 Hz.

PERFORMANCE CURVE

VOLUTE 26821-754 CURVE VGH2E-B-4  
 IMPELLER 26821-471 MODEL VGH2E-B  
 SIZE 3"X2" IMP.DIA. NOTED  
 SP.GR. .80 RPM 2900

M PSI FT  
 220 250 700  
 200 225 650  
 180 200 600  
 160 175 550  
 140 150 500  
 120 125 450  
 100 100 400  
 80 75 350  
 60 50 300  
 40 25 250  
 20 10 200  
 0 0 150  
 0 0 100  
 0 0 50

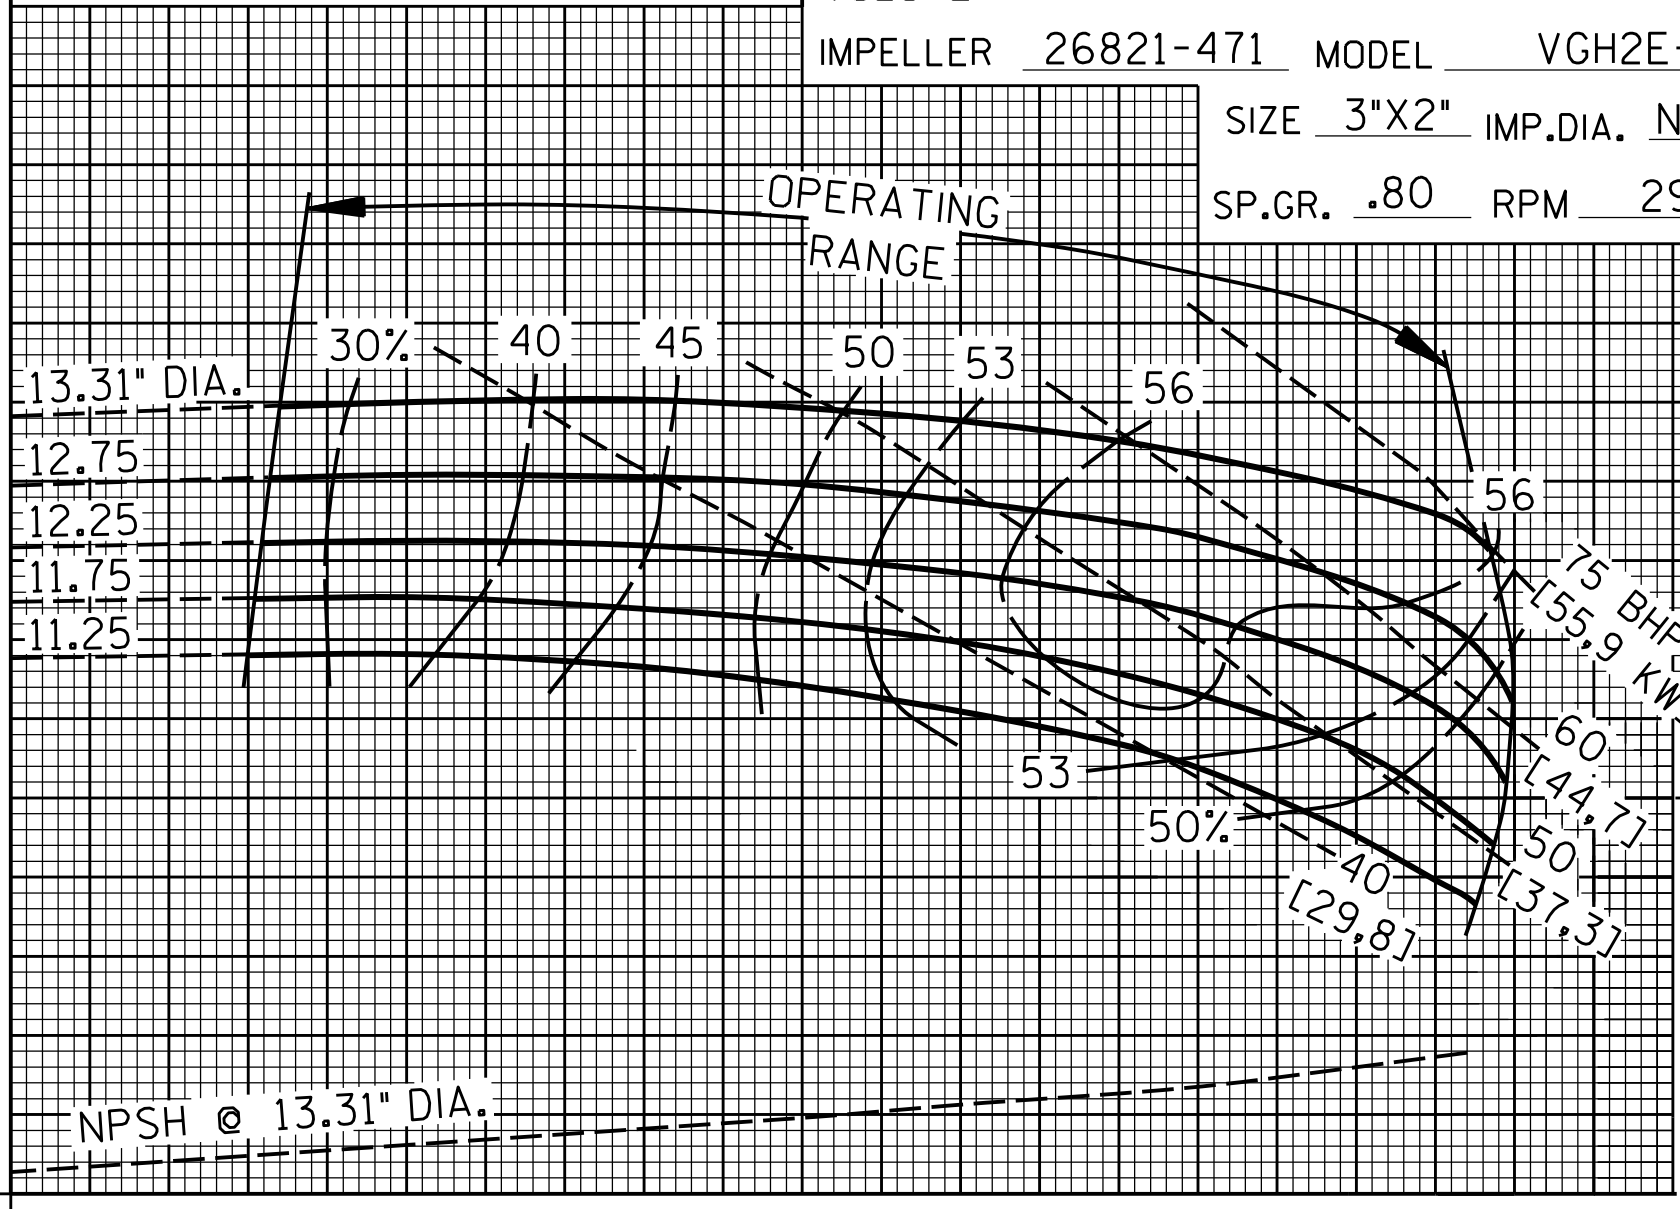

U.S. GALLONS PER MINUTE  
 LITRES PER SECOND  
 CUBIC METRES PER HOUR

0 25 50 75 100 125 150 175 200 225 250 275 300 325 350 375 400 425 450 475 500  
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32  
 0 10 20 30 40 50 60 70 80 90 100 110

NPSH  
 FT M  
 10 8 6 4 2 0



C-12-24-R