

PERFORMANCE CURVE




REPRIMING LIFTS

RPM	750	850	1050	1250	1450	1550
FEET	5	6	10	15	20	21
METERS	1,5	1,8	3,0	4,6	6,1	6,4

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lift.
2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

VOLUTE 38224-614 CURVE VS3A-B-3
 IMPELLER 38615-103 MODEL VS3A-B
 SIZE 4"X3" IMP.DIA. 9.00"
 SP.GR. 1.0 RPM NOTED

Note:
Select performance within
operating range of curve.

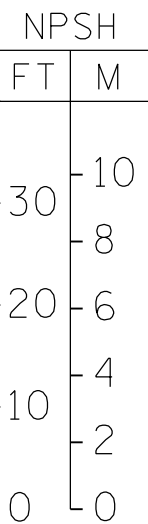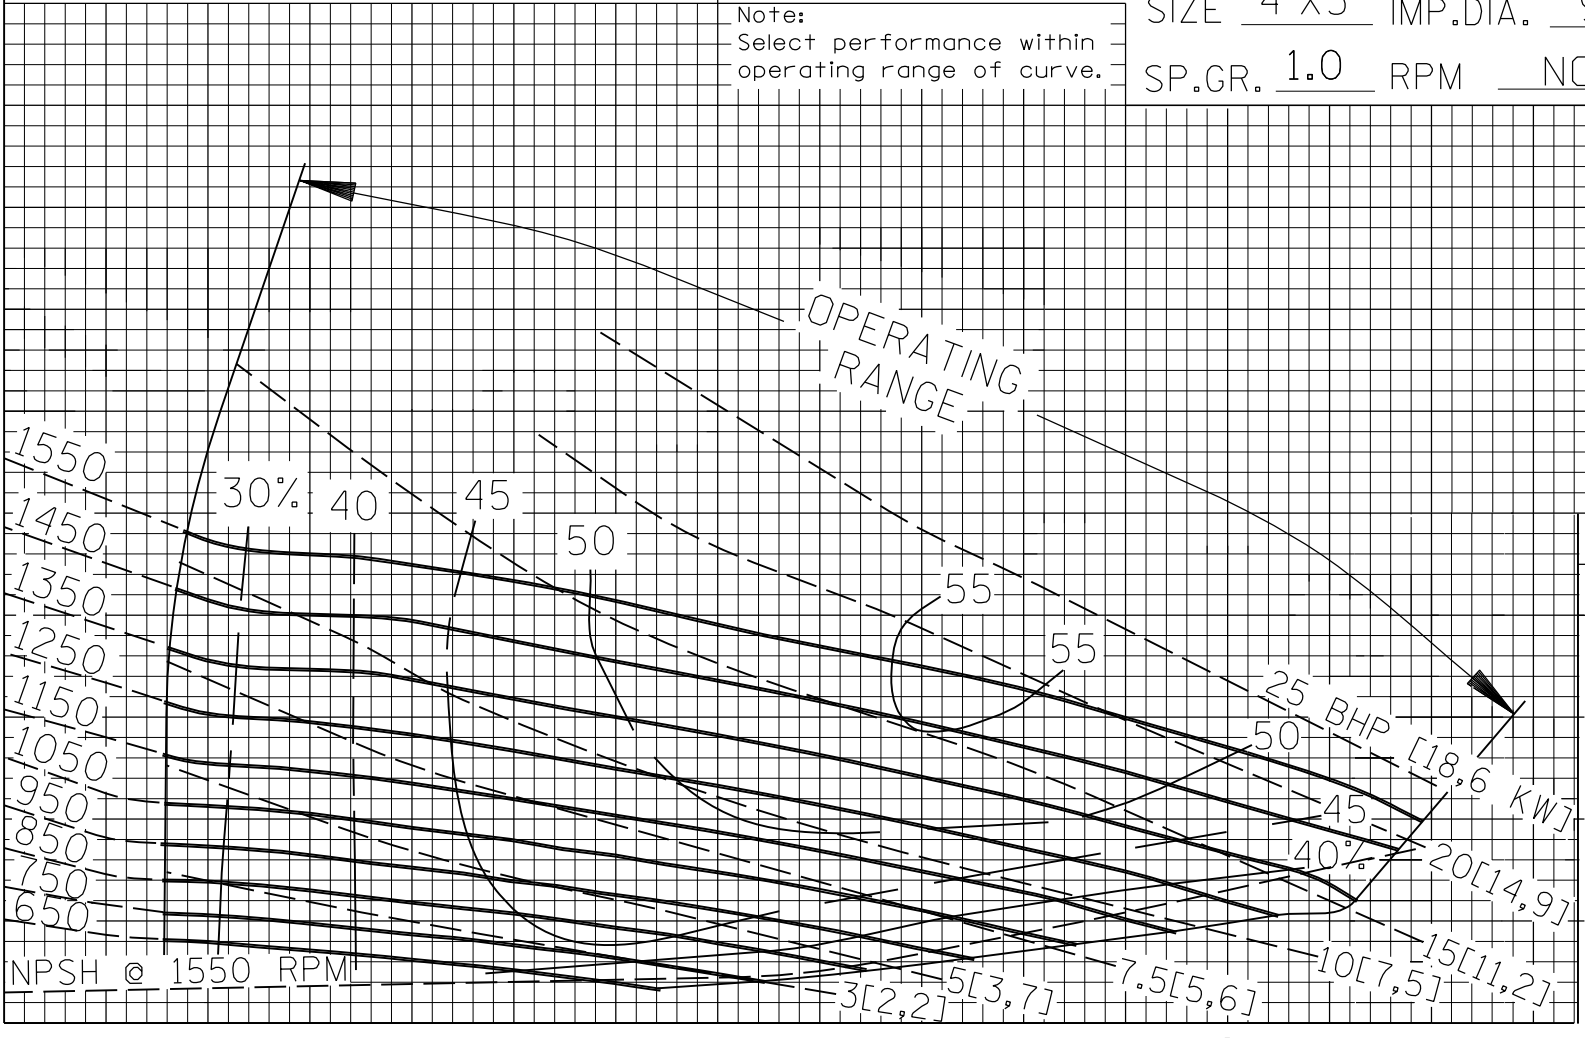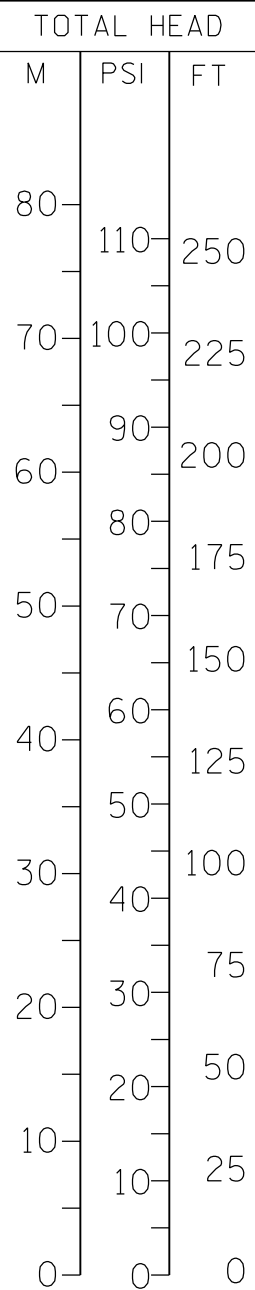

FILE NO. vs3ab.s03

