


MOTOR FRAME	CENTER DISTANCE
143T - 145T	12.00 [304,8]
182T - 184T 182 - 184	13.00 [330,2]
213T - 215T 213 - 215	13.75 [349,2]
254T - 256T 254U - 256U	14.75 [374,6]

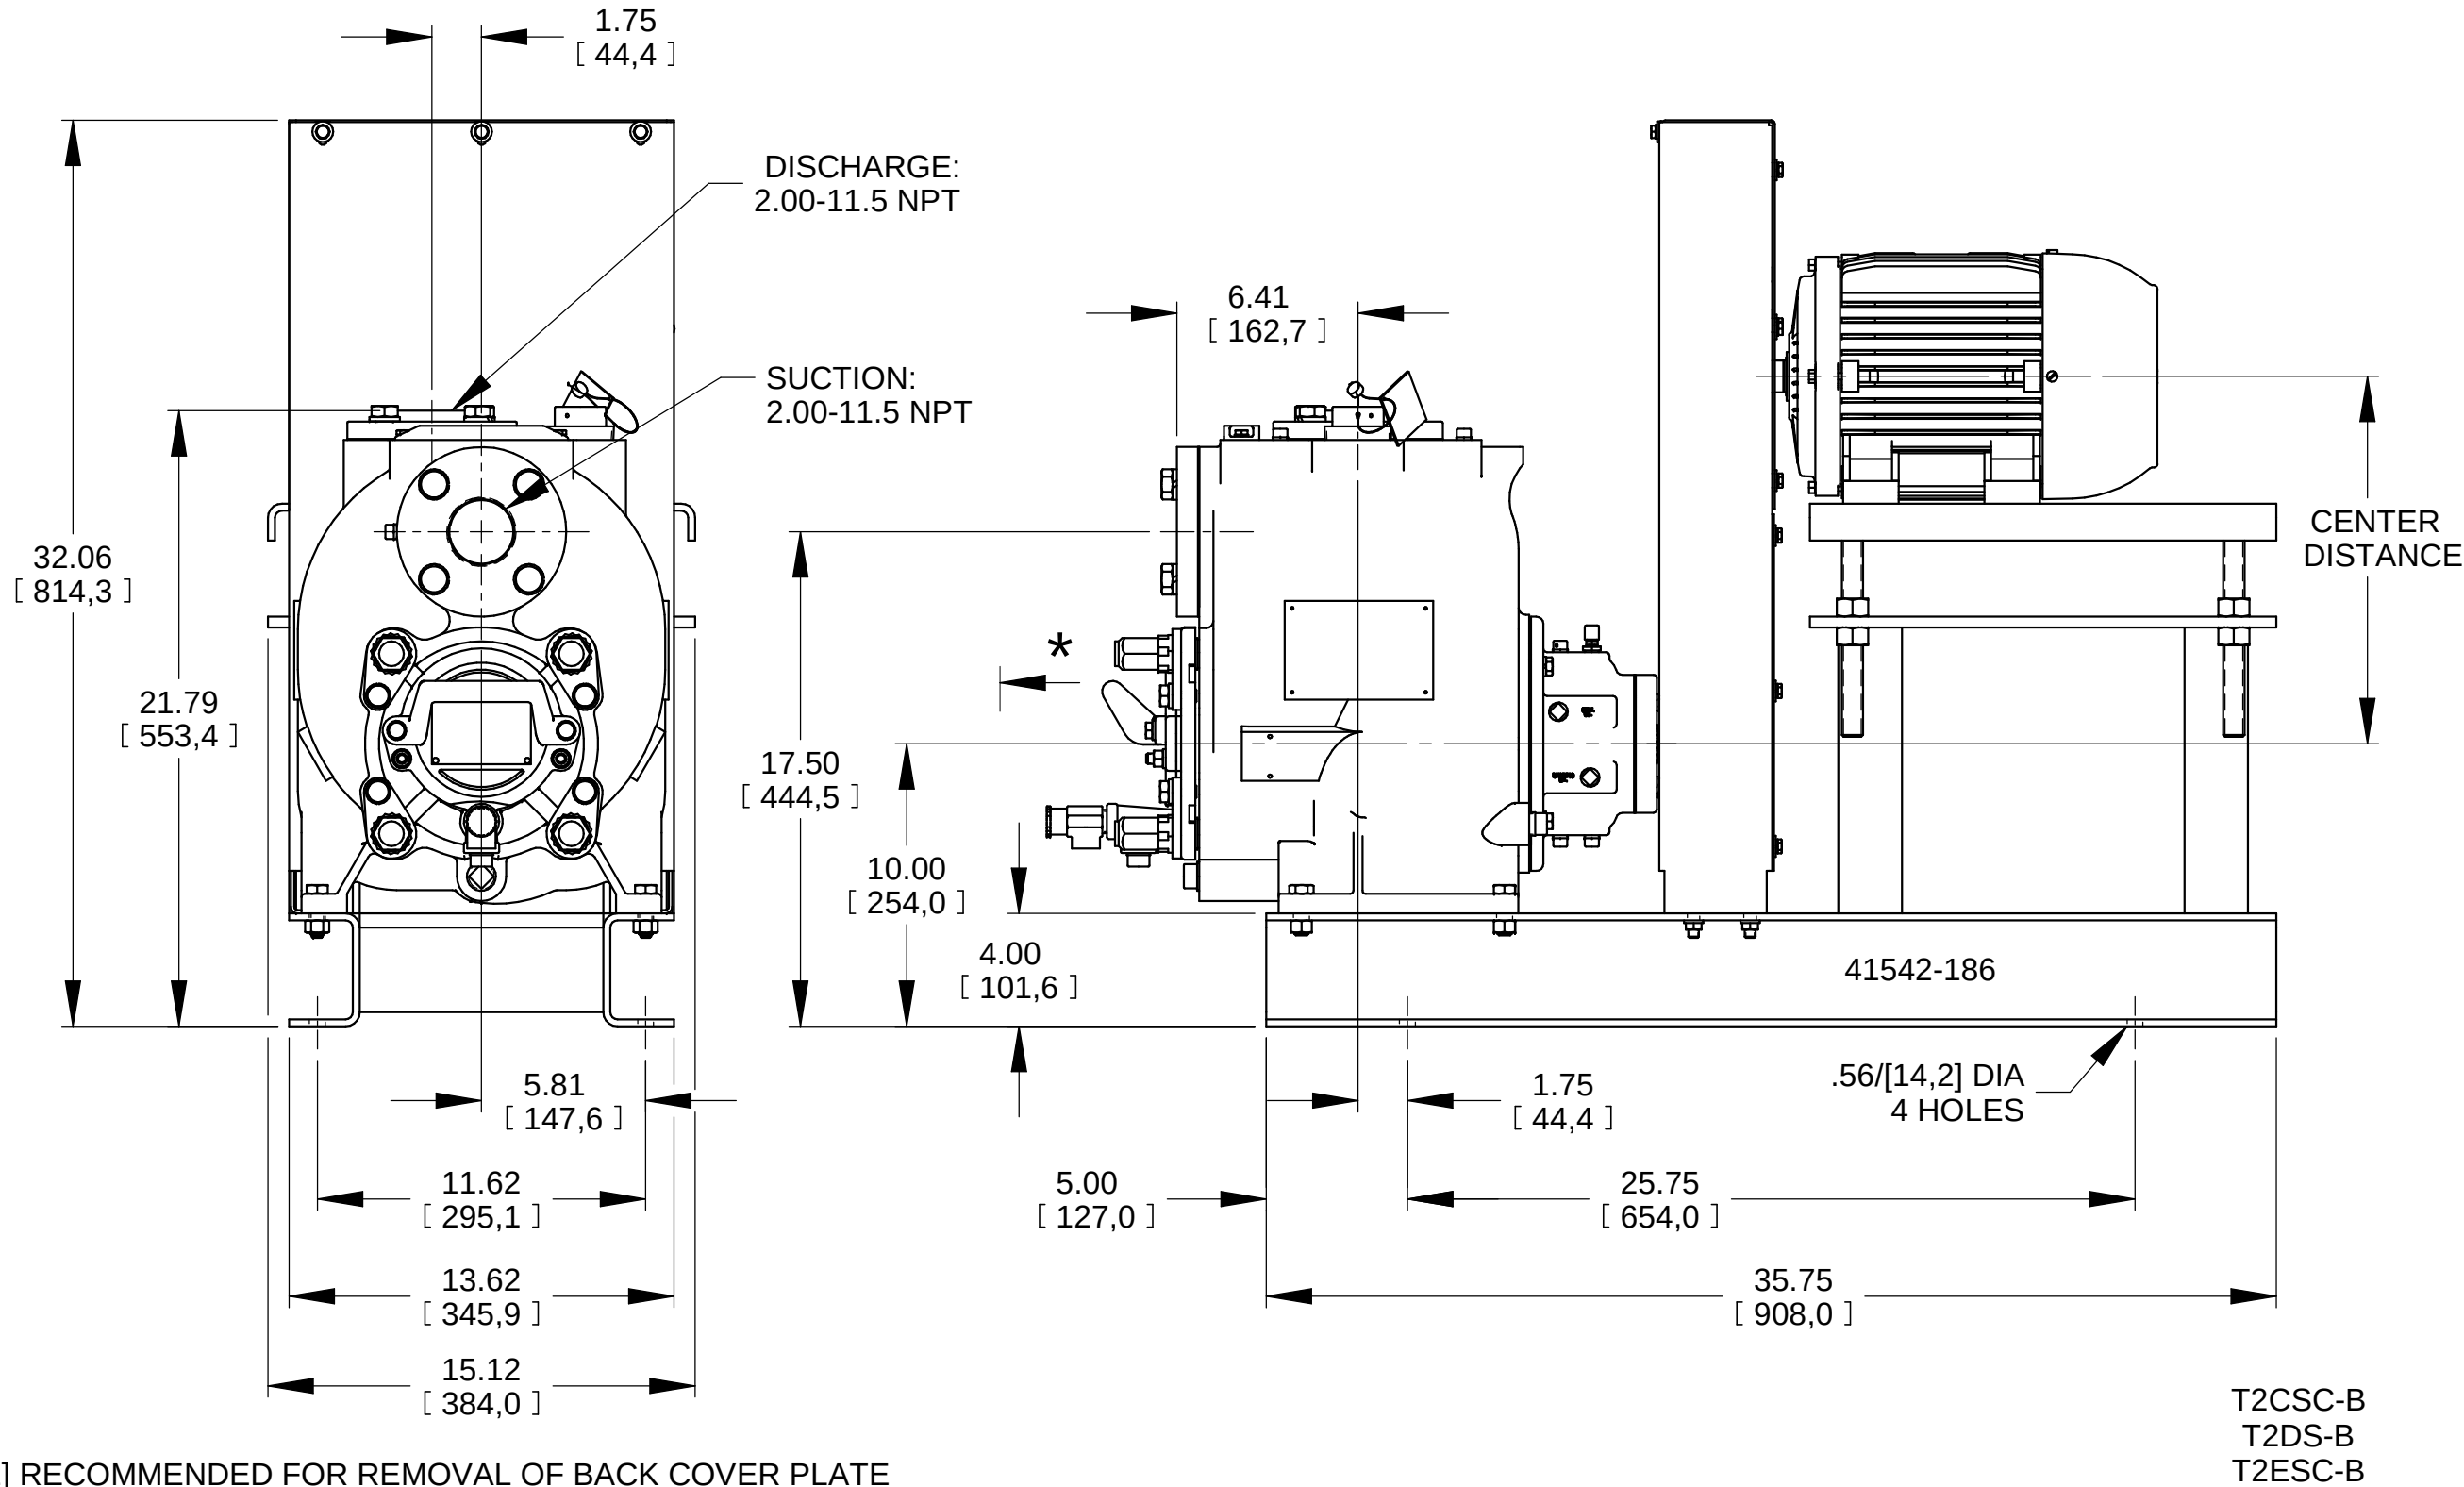

*18.00/[457,2] RECOMMENDED FOR REMOVAL OF BACK COVER PLATE
T2CSC-B - 8.50/[215,9] REQUIRED FOR REMOVAL OF BACK COVER PLATE
T2DS-B / T2ESC-B - 9.50/[241,3] REQUIRED FOR REMOVAL OF BACK COVER PLATE

DIMENSIONS:
INCHES
[MILLIMETERS]