


GORMAN-RUPP S-LINE

Specifications

82-45

The Gorman-Rupp S-Line 82-45 is a diesel engine-driven self-priming pump unit for pumping clean or solids-laden water, and for light or non-frequent use for abrasive liquids (A1).

82-45 performance

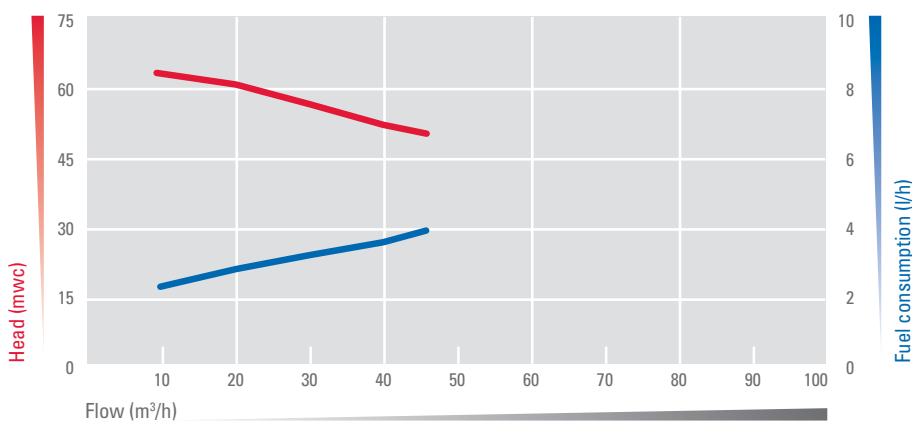

PUMP

Gorman-Rupp 82H52 self-priming centrifugal pump



ENGINE

Kohler KDW702 water-cooled 4-stroke 686 cc 2-cylinder diesel engine



IMPELLER

7.12" cast iron impeller



PERFORMANCE

Max. 45 m³/h flow or 64 mwc head



DIMENSIONS

2" x 2" BSP-T connection size, max. 19 mm solids

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

ENCLOSURE

Steel enclosure, powder-coated RAL 5003, with hinged doors.

FUEL TANK

60 liters

TARE WEIGHT

580 kg

