


# GORMAN-RUPP S-LINE

## Specifications

# PA4-160-L/LS

The Gorman-Rupp S-Line PA4-160 is a diesel engine-driven priming assisted pump unit for pumping clean or solids-laden water (L-version) and / or sewage (LS-version).

PA4-160 performance

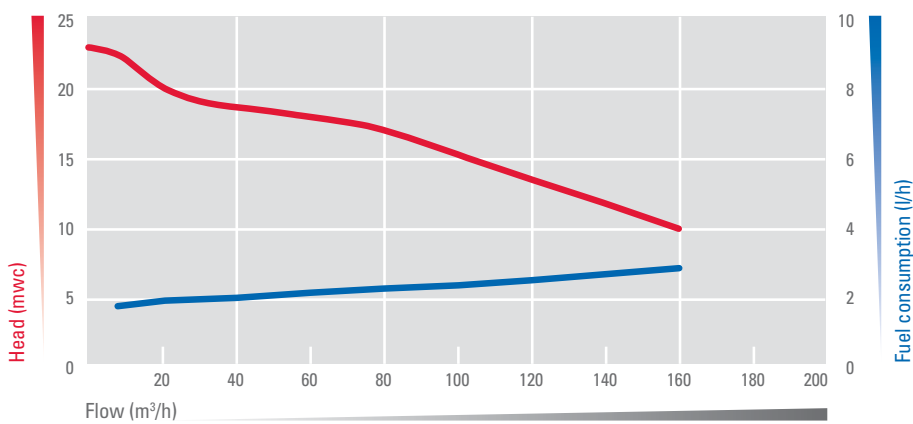

### CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

### FUEL TANK

200 liters

### ENCLOSURE

Steel enclosure, powder coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

### TARE WEIGHT

965 kg



### PUMP

Gorman-Rupp PA4A60D priming assisted centrifugal pump



### ENGINE

Kohler KDW1003 water-cooled 4-stroke 1,028 cc 2-cylinder diesel engine



### IMPELLER

Semi-open 7" ductile iron impeller LS-version: with 'snaggletooth' wear plate



### PERFORMANCE

Max. 160 m³/h flow or 21 mwc head



### DIMENSIONS

4" x 4" BSP-T connection size, max. 76.2 mm solids

