


PA6-380-A

GORMAN-RUPP S-LINE

Specifications

The Gorman-Rupp S-Line PA6-380-A is a diesel engine-driven priming assisted pump unit for pumping all liquids, including abrasives such as bentonite. Available in A1- and A2-versions.

PA6-380-A performance

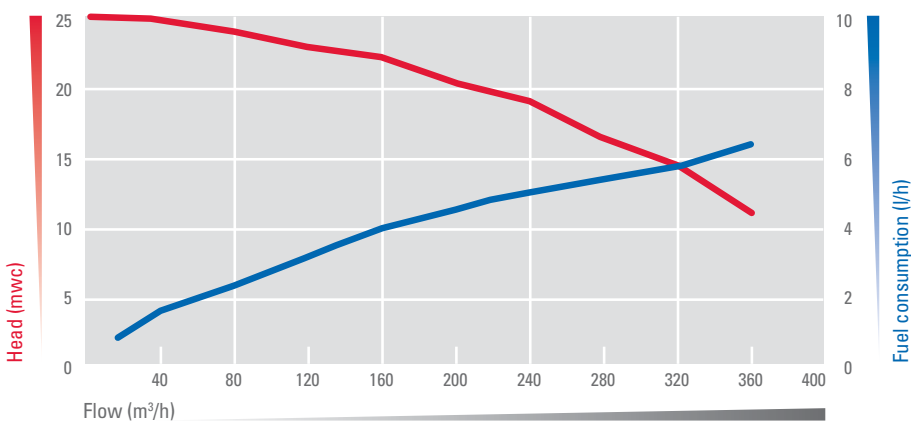

PUMP

Gorman-Rupp PA6C71D priming assisted centrifugal pump



ENGINE

Kohler KDI1903TCR water-cooled 4-stroke 1,861 cc 3-cylinder diesel engine



IMPELLER

Semi-open 10.62" wear-resistant austenitic ADI-A71 cast iron impeller. Optional with HiCr impeller



PERFORMANCE

Max. 380 m³/h flow or 25 mwc head



DIMENSIONS

6" x 6" BSP-T connection size, max. 76.2 mm solids

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

ENCLOSURE

Steel enclosure, powder coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

FUEL TANK

200 liters

TARE WEIGHT

1,610 kg

