


GORMAN-RUPP S-LINE

Specifications

PA6-380-L/LS

The Gorman-Rupp S-Line PA6-380 is a diesel engine-driven priming assisted pump unit for pumping clean or solids-laden water (L-version) and / or sewage (LS-version).

PA6-380 performance

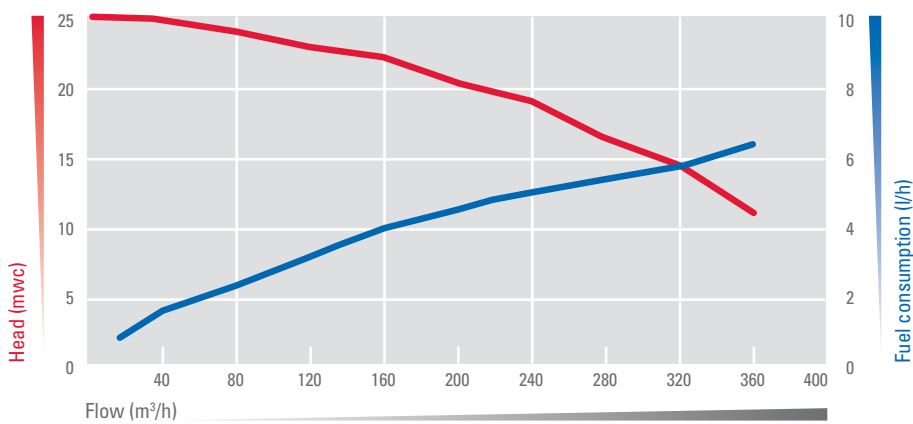

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

FUEL TANK

200 liters

ENCLOSURE

Steel enclosure, powder coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

TARE WEIGHT

1,610 kg



PUMP

Gorman-Rupp PA6C60D priming assisted centrifugal pump



ENGINE

Kohler KDI1903TCR water-cooled 4-stroke 1,861 cc 3-cylinder diesel engine



IMPELLER

Semi-open 10.62" ductile iron impeller. LS-version: with 'snaggletooth' wear plate



PERFORMANCE

Max. 380 m³/h flow or 25 mwc head



DIMENSIONS

6" x 6" BSP-T connection size, max. 76.2 mm solids

