


GORMAN-RUPP S-LINE

Specifications

PAE3-60-L

The Gorman-Rupp S-Line PAE3-60-L is a diesel engine-driven priming assisted pump unit for pumping clean or solids-laden water.

PAE3-60 performance

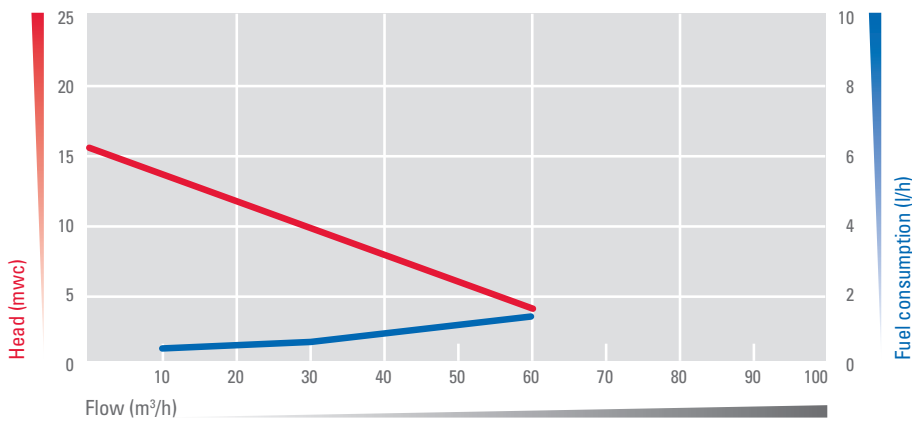

PUMP

PAE3D priming assisted centrifugal pump



ENGINE

Kohler KDW702 water-cooled 4-stroke 686 cc 2-cylinder diesel engine



IMPELLER

6.35" cast iron impeller



PERFORMANCE

Max. 60 m³/h flow or 15 mwc head



DIMENSIONS

3" x 3" BSP-T connection size, max. 23 mm solids

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

ENCLOSURE

Steel enclosure, powder-coated RAL 5003, with hinged doors.

FUEL TANK

60 liters

TARE WEIGHT

535 kg

