


PAV3-85-LS

GORMAN-RUPP S-LINE

Specifications

The Gorman-Rupp S-Line PAV3-85-LS is a diesel engine-driven priming assisted pump unit for pumping clean, solids-laden and sewage water.

PAV3-85 performance

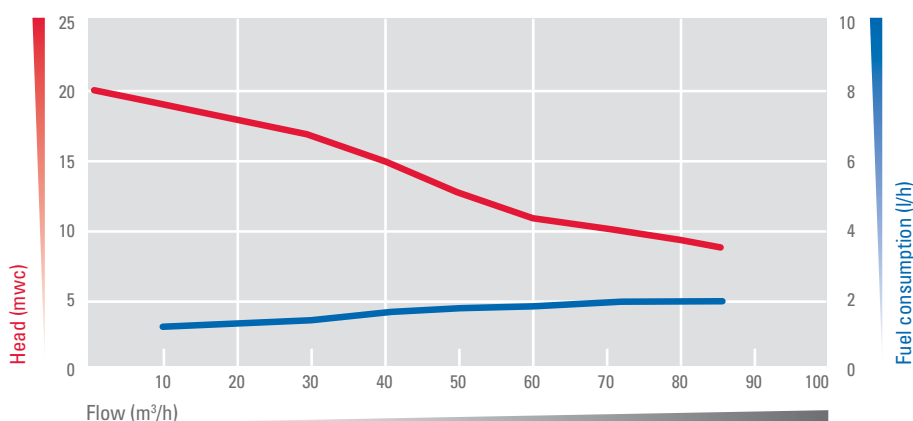

PUMP

Gorman-Rupp PAV3A60D priming assisted centrifugal pump



ENGINE

Kohler KDW702 water-cooled 4-stroke 686 cc 2-cylinder diesel engine



IMPELLER

7.5" ductile iron impeller



PERFORMANCE

Max. 85 m³/h flow or 20 mwc head



DIMENSIONS

3" x 3" BSP-T connection size, max. 76.2 mm solids

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

ENCLOSURE

Steel enclosure, powder coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

FUEL TANK

90 liters

TARE WEIGHT

825 kg

