


GORMAN-RUPP S-LINE

Specifications

T10-750-L/LS

The Gorman-Rupp S-Line T10-750 is a diesel engine-driven self-priming pump unit for pumping clean or solids-laden water (L-version) and / or sewage (LS-version).

T10-750 performance

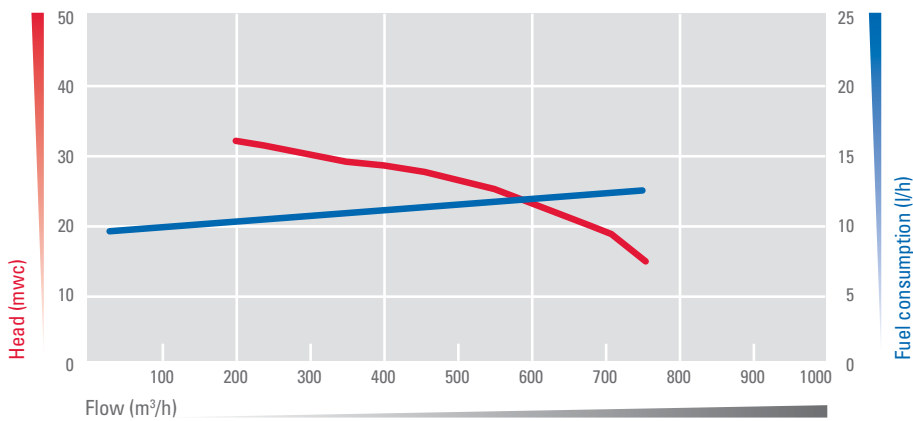

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

FUEL TANK

400 liters

ENCLOSURE

Steel enclosure, powder-coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

TARE WEIGHT

2,280 kg



PUMP

Gorman-Rupp T10A60 self-priming centrifugal pump (SAE4)



ENGINE

Kohler KDI2504TCR water-cooled 4-stroke 2,482 cc 4-cylinder diesel engine



IMPELLER

12.25" ductile iron impeller LS-version: with Eradicator™



PERFORMANCE

Max. 750 m³/h flow or 33 mwc head



DIMENSIONS

10" x 10" BSP-T connection size, max. 76.2 mm solids

