


T6-280-L/LS

GORMAN-RUPP S-LINE

Specifications

The Gorman-Rupp S-Line T6-280 is a diesel engine-driven self-priming pump unit for pumping clean or solids-laden water (L-version) and / or sewage (LS-version).

T6-280 performance

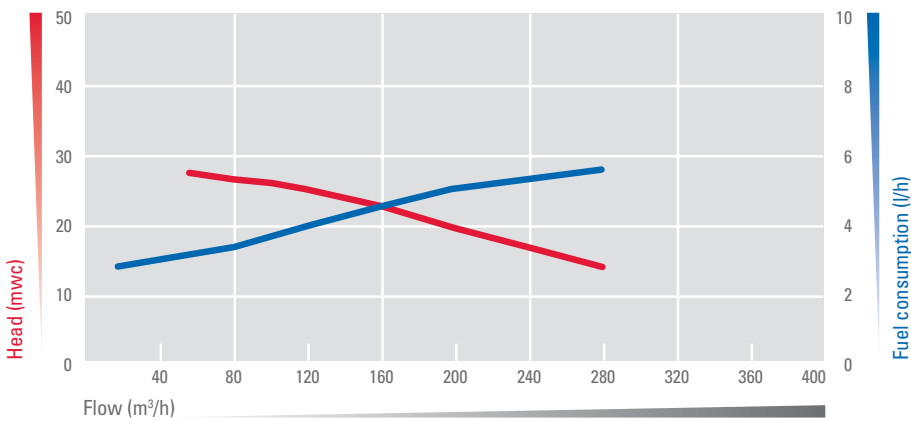

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

FUEL TANK

200 liters

ENCLOSURE

Steel enclosure, powder-coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

TARE WEIGHT

1,705 kg



PUMP

Gorman-Rupp T6A60 self-priming centrifugal pump (SAE4)



ENGINE

Kohler KDW1903TCR water-cooled 4-stroke 1,861 cc 3-cylinder diesel engine



IMPELLER

11.00" ductile iron impeller LS-version: with Eradicator™



PERFORMANCE

Max. 280 m³/h flow or 27 mwc head



DIMENSIONS

6" x 6" BSP-T connection size, max. 76.2 mm solids

