


V3-160-L/LS

GORMAN-RUPP S-LINE

Specifications

The Gorman-Rupp S-Line V3-160 is a diesel engine-driven self-priming pump unit for pumping clean or solids-laden water (L-version) and / or sewage (LS-version).

V3-160 performance

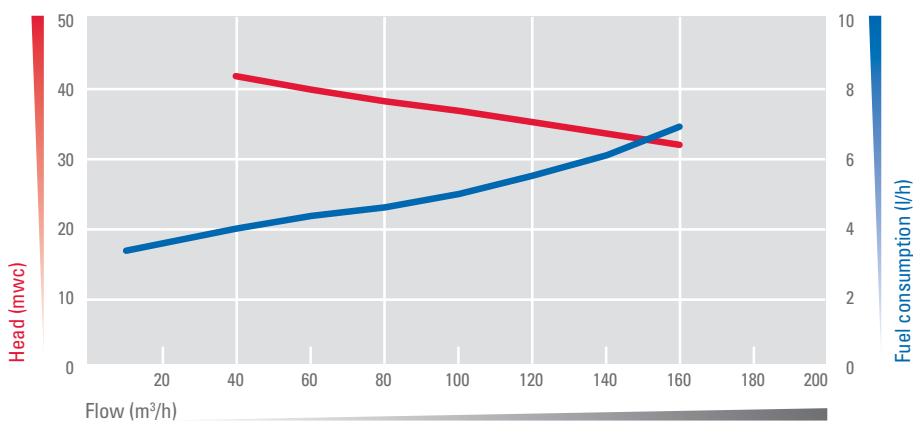

CHASSIS

Steel, fully welded and hot-dip galvanized. Equipped with drain plug, oil spill containment environmental base design and forklift pockets.

FUEL TANK

200 liters

ENCLOSURE

Steel enclosure, powder-coated RAL 5003, and sandwich composite gull-wing hinged doors with gas springs.

TARE WEIGHT

1,420 kg



PUMP

Gorman-Rupp V3A60 self-priming centrifugal pump (SAE5/7.5, FM/S1)



ENGINE

Kohler KDW1903TCR water-cooled 4-stroke 1,861 cc 3-cylinder diesel engine



IMPELLER

9.00" ductile iron impeller LS-version: with 'snaggletooth' wear plate



PERFORMANCE

Max. 160 m³/h flow or 42 mwc head



DIMENSIONS

4" x 3" BSP-T connection size, max. 63.5 mm solids

