



VARIOUS PATENTS APPLY

Diesel Engine Driven Priming Assisted Centrifugal Pump w/Autostart Model PAV3B60C-3TNV70 Size 3" x 3"



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance			
P.S.I.	Feet				
51.6	119	52	52	52	52
47.7	110	101	140	140	140
43.4	100	108	180	217	217
39.0	90	116	189	235	261
34.7	80	124	196	246	286
30.3	70	132	205	257	300
26.0	60	140	214	268	317
21.7	50	147	221	279	325
17.3	40	155	230	289	338
13.0	30	163	238	301	350
Suction Lift		25'	20'	15'	10'



PUMP SPECIFICATIONS

- Size:** 3" x 3" (76,2 mm x 76,2 mm) Flanged.
- Casing:** Gray Iron 30.
- Maximum Operating Pressure** 77 psi (531 kPa).*
- Four Vane Vortex Impeller:** Ductile Iron 65-45-12.
Handles 3" (76,2 mm) Diameter Spherical Solids.
- Impeller Shaft:** Alloy Steel 4150.
- Bearing Housing:** Gray Iron 30.
- Seal:** Cartridge Type, Mechanical, Oil-Lubricated, Double Floating, Self-Aligning. Silicon Carbide Rotating and Stationary Faces. Stainless Steel 316 Stationary Seat. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel 18-8 Cage and Spring. Maximum Temperature of Liquid Pumped, 160°F (71 °C).*
- Shaft Sleeve:** Alloy Steel 4130.
- Priming Chamber:** Gray Iron 30 Housing w/Stainless Steel Float and Linkage.
- Flap Valve:** Neoprene w/Nylon and Steel Reinforcing.
- Removable Cleanout Cover Plate:** Gray Iron 30.
- Thrust and Radial Bearings:** Open Single Row Ball.
- Bearing Lubrication:** SAE #30 Non-Detergent Oil.
- Flanges:** Gray Iron 30.
- Gaskets:** Vegetable and Compressed Synthetic Fibers.
- O-Rings:** Fluorocarbon (DuPont Viton® or Equivalent) and Buna-N.
- Hardware:** Standard Plated Steel.
- Bearing and Seal Oil Sight Gauge.**

**Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.*

Standard Equipment: Belt-Driven Air Compressor. Hoisting Bail. Combination Skid Base w/Fuel Tank. Strainer. Single Ball Type Float Switch.**

Optional Equipment: Battery. High Speed (55 MPH/89 KM/H) Wheel Kit with 5.3 x 12" Pneumatic Tires. 3" NPT Flange Kit. Metric Flanges

***50 Ft. (15 m) Standard Length; Dual Switches and Alternate Cable Lengths Available From the Factory.*

WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

ENGINE SPECIFICATIONS

- Model:** Yanmar 3TNV70.
- Type:** Three Cylinder, Four Cycle, Liquid Cooled Diesel Engine.
- Displacement** 52 Cu. In. (.854 Liters).
- Governor:** Electronic Isochronous.
- Lubrication:** Forced Circulation.
- Air Cleaner:** Dry Type.
- Oil Reservoir:** 1.8 U.S. Quart (1.7 Liters) Refill.
- Fuel Tank:** 28 U.S. Gallons (106 Liters).
- Full Load Operating Time:** 24 Hrs.
- Starter:** 12V Electric.

Standard Features: Low Oil Pressure and High Coolant Temperature Safety Shut Down Switches. Autostart Instrument Panel Includes: Tachometer, Voltmeter, Hourmeter, Coolant Temperature Gauge, Oil Pressure Gauge, Manual/Stop/Auto Key Switch, 10 Amp Pushbutton Circuit Breaker, Startup Warning Delay. Muffler w/Weather Cap. Throttle Control.

YANMAR PUBLISHED PERFORMANCE:
Maximum Net Industrial B.H.P.
21.9 (16.3 kW) @ 3600 RPM



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice



Printed in U.S.A.

Specification Data

SECTION 42, PAGE 140

APPROXIMATE
DIMENSIONS and WEIGHTS

SKID BASE **2-WHEEL**
NET WEIGHT: 1160 LBS. (526,2 KGS.) 1345 LBS. (610 KGS.)
SHIPPING WEIGHT: 1360 LBS. (616,9 KGS.) 1345 LBS. (610 KGS.)
EXPORT CRATE SIZE: 78 CU. FT. (2,2 CU. M.)

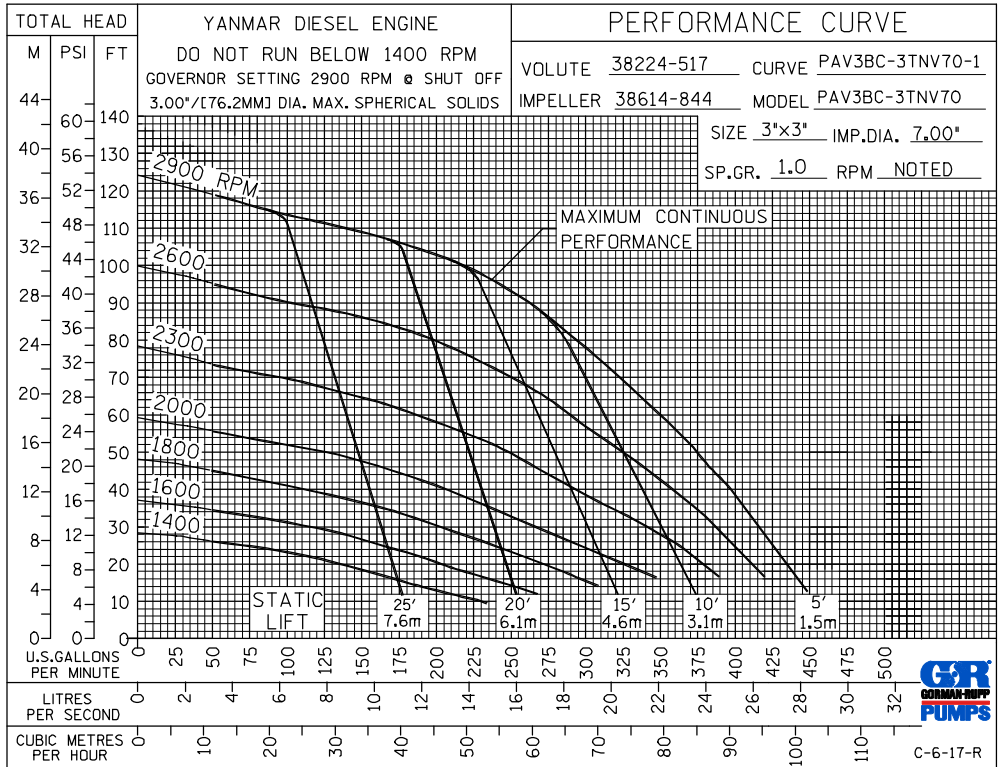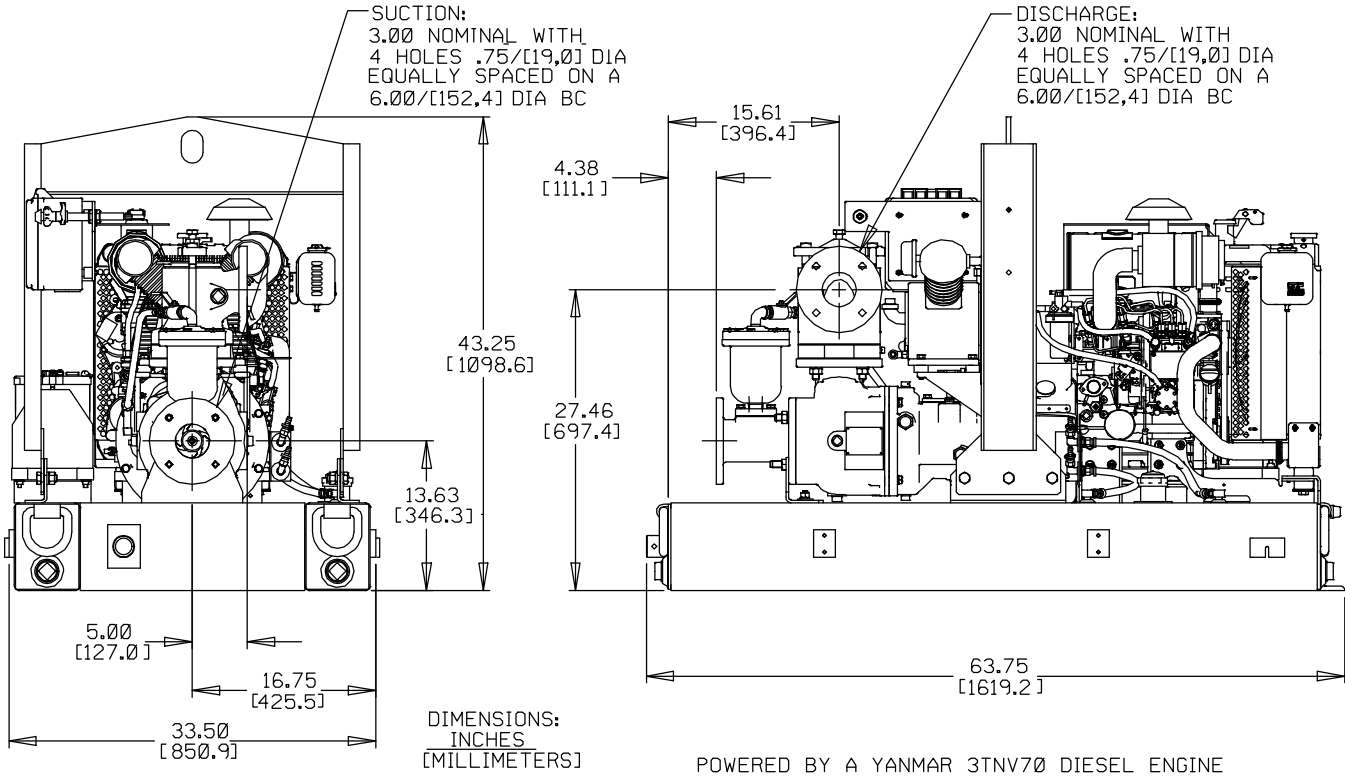

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.