

ACDEU



Priming Assisted Centrifugal Pump w/Autostart Model PA6C60-QSB4.5P Size 6" x 6"



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance				
P.S.I.	Feet					
63.3	146	200	200	200	200	200
60.7	140	400	400	400	400	400
52.0	120	820	1000	1000	1000	1000
43.4	100	960	1380	1420	1420	1420
34.7	80	1040	1500	1770	1770	1760
26.0	60	1100	1510	1815	2050	2040
17.4	40	1140	1505	1820	2120	2240
8.7	20	1200	1550	1820	2150	2360
Suction Lift		25'	20'	15'	10'	5'

PUMP SPECIFICATIONS

Size: 6 x 6" (152 mm x 152 mm) Flanged.

Casing: Ductile Iron 65-45-12.

Maximum Operating Pressure 99 psi (683 kPa).*

Open Type, Two Vane Impeller: Ductile Iron 65-45-12.

Handles 3" (76,2 mm) Diameter Spherical Solids.

Suction Cover: Gray Iron 30.

Impeller Shaft: Stainless Steel 17-4 PH.

Replaceable Wear Plate: Ductile Iron 80-60-03.

Removable Cleanout Cover Plate: Gray Iron 30.

Intermediate Bracket: Gray Iron 30.

Seal Plate: Gray Iron 30.

Seal: Mechanical, Oil-Lubricated. Silicon Carbide Rotating and Stationary Faces. Stainless Steel 316 Stationary Seat. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel 18-8 Cage and Spring. Maximum Temperature of Liquid Pumped, 160°F (71°C).*

Shaft Sleeve: Stainless Steel 17-4 PH.

Priming Chamber: Gray Iron 30 Housing w/Stainless Steel Float and Linkage.

Discharge Check Valve: Ductile Iron Housing w/Buna-N Flapper.

Radial/Thrust Bearings: Open Double Ball.

Bearing and Seal Cavity Lubrication: SAE 30 Non-Detergent Oil.

Gaskets: Resistant Synthetic Rubber, Cork, PTFE, Vegetable Fiber, and Compressed Synthetic Fibers.

O-Rings: Buna-N.

Hardware: Standard Plated Steel.

Bearing and Seal Cavity Oil Level Sight Gauges.

*Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.

Standard Equipment: Gear-Driven Air Compressor. Hoisting Bail. Strainer. Combination Skid Base w/Fuel Tank. Single Ball Type Float Switch.**

Optional Equipment: Batteries (2 Req'd). Heated Priming Chamber Kit. NPT Suction and Discharge Flange Kits. High Speed (55 MPH/89 KM/H) Single Axle Pneumatic-Tired Wheel Kit w/wo DOT-Approved Lights and Electric Brakes. Tandem Axle Over-the-Road Trailer (Meets DOT Requirements) Available w/Either Electric or Hydraulic Surge Brakes, Running Lights, Jack Stands and Safety Cables/Chains. EPS w/Submersible Transducer Liquid Level Sensor (50 Ft. [15M] Cable Standard, Alternate Lengths Available).

**50 Ft. (15 m) Standard Length; Dual Switches and Alternate Cable Lengths Available From the Factory.



WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

ENGINE SPECIFICATIONS

Model: Cummins QSB4.5P.

Type: Four Cylinder, Four Cycle, Turbocharged, Charge Air Cooled, Liquid Cooled Diesel Engine.

Displacement: 272 Cu. In. (4,5 liters).

Governor: Electronic.

Lubrication: Forced Circulation.

Air Cleaner: Dry Type.

Oil Reservoir: 13.7 U.S. Qts. (13 liters) Dry;
11.6 U.S. Qts. (10 liters) Refill.

Fuel Tank: 88 U.S. Gals. (330 liters).

Full Load Operating Time: 22.3 Hrs.

Starter: 12V Electric.

Standard Features: Engine Enclosure. Low Oil Pressure and High Coolant Temperature Safety Shut Down Switches/Indicators. Autostart Instrument Panel Includes: Tachometer, Voltmeter, Hourmeter, Coolant Temperature Gauge, Oil Pressure Gauge, Manual/Stop/Auto Key Switch, 10 Amp Fuse for Overload Protection, Audible Startup Warning Delay. Muffler and Weather Cap. Pushbutton Throttle Control.

CUMMINS PUBLISHED PERFORMANCE:

Maximum Gross Continuous BHP
110 (82 kW) @ 2200 RPM



THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.

Specification Data

SECTION 42, PAGE 1133

APPROXIMATE
DIMENSIONS and WEIGHTS

NET WEIGHT:

SKID BASE

2-WHEEL

3810 LBS. (1183,9 KG.)



4410 LBS. (2000 KG.)

SHIPPING WEIGHT:

4150 LBS. (1306,3 KG.)

4410 LBS. (2000 KG.)

EXPORT CRATE SIZE: 360 CU. FT. (10,2 CU. M.)

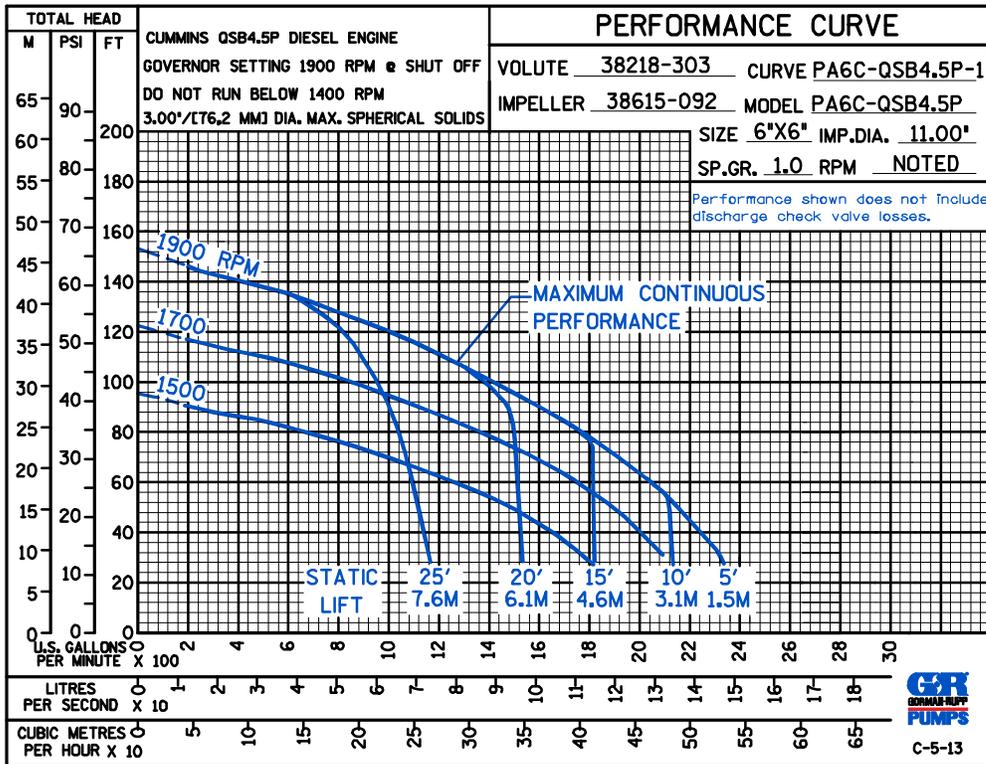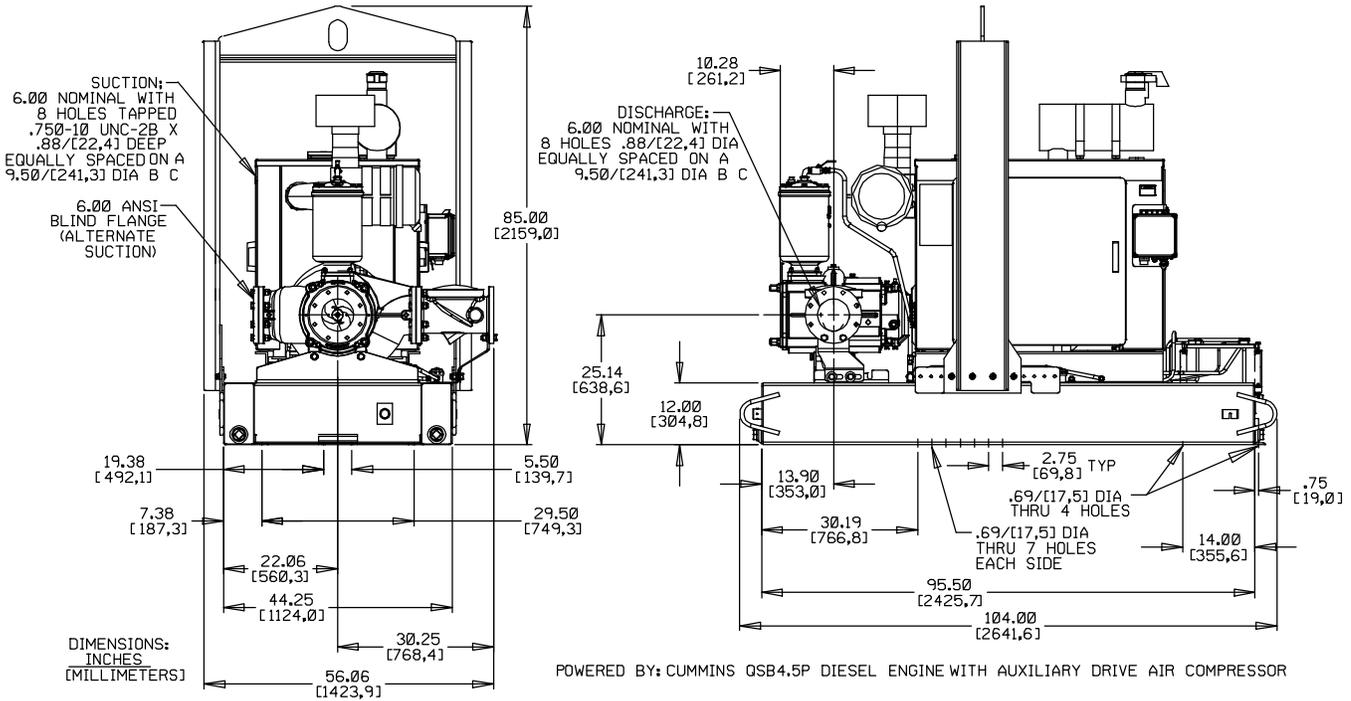

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

Specifications Subject to Change Without Notice

Printed in U.S.A.