



Priming Assisted Centrifugal Pump w/Autostart Model PAH3B60-QSB4.5P Size 6" x 3"



Total Head		Capacity of Pump in U.S. Gallons per Minute (GPM) at Continuous Performance			
P.S.I.	Feet				
126.1	291	350	350	350	350
121.3	280	540	635	635	635
104.0	240	555	755	870	870
86.7	200	555	760	930	990
69.4	160	555	760	934	1020
52.0	120	555	762	934	1030
34.7	80	555	770	935	1035
17.3	40	555	775	935	1040
Suction Lift		25'	20'	15'	10'

Photo Unavailable at Publishing

PUMP SPECIFICATIONS

Size: 6" x 3" (152 mm x 76 mm) Flanged.
Casing: Ductile Iron 65-45-12.
 Maximum Operating Pressure 195 psi (1345 kPa).*
Enclosed Type, Five Vane Impeller: Ductile Iron 65-45-12.
 Handles 1/2" (12,7 mm) Diameter Spherical Solids.
Suction Head: Ductile Iron 65-45-12.
Suction Spool: Gray Iron 30.
Impeller Shaft: Alloy Steel 4150M.
Replaceable Wear Ring: Ductile Iron 65-45-12.
Pedestal: Gray Iron 30.
Seal Plate: Gray Iron 30.
Seal: Mechanical, SAE 30 Non-Detergent Oil-Lubricated. Silicon Carbide Rotating Face and Stationary Seat. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel 316 Cage and Stainless Steel 18-8 Spring. Maximum Temperature of Liquid Pumped 160 F (71 C).*
Shaft Sleeve: Stainless Steel 303/304.
Priming Chamber: Gray Iron 30 Housing w/Stainless Steel Float and Linkage.
Discharge Check Valve: Ductile Iron Housing w/Buna-N Flapper.
Radial Bearing: Open Single Ball.
Thrust Bearing: Open Double Ball.
Bearing Cavity Lubrication: Lithium EP2 Grease.
Gaskets: Vegetable Fiber.
O-Rings: Buna-N.
Hardware: Standard Plated Steel.
Seal Cavity Oil Level Sight Gauges.
**Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.*
Standard Equipment: Gear-Driven Air Compressor. Strainer. Hoisting Bail. Combination Skid Base w/Fuel Tank. Single Ball Type Float Switch.**
Optional Equipment: Batteries (2 Req'd). Heated Priming Chamber Kit. Suction Vacuum and Discharge Pressure Gauge Kit. High Speed (55 MPH/89 KM/H) Single Axle Pneumatic-Tired Wheel Kit w/w_o DOT-Approved Lights and Electric Brakes. Tandem Axle Over-the-Road Trailer (Meets DOT Requirements) Available w/Either Electric or Hydraulic Surge Brakes, Running Lights, Jack Stands and Safety Cables/Chains. EPS w/Submersible Transducer Liquid Level Sensor (50 Ft. [15M] Cable Standard, Alternate Lengths Available). Threaded Flange Kit.
****50 Ft. (15 m) Standard Length; Dual Switches and Alternate Cable Lengths Available From the Factory.**

WARNING!

Do not use in explosive atmosphere or for pumping volatile flammable liquids.

ENGINE SPECIFICATIONS

Model: Cummins QSB4.5P
Type: Four Cylinder, Four Cycle, Turbocharged, Charge Air Cooled, Liquid Cooled Diesel Engine.
Displacement: 272 Cu. In. (4,5 liters).
Governor: Electronic Isochronous.
Lubrication: Forced Circulation.
Air Cleaner: Dry Type.
Oil Reservoir: 13.7 U.S. Qts. (13 liters) Dry; 11.6 U.S. Qts. (10 liters) Refill.
Fuel Tank: 88 U.S. Gals. (330 liters).
Full Load Operating Time: 16.0 Hrs.
Starter: 12V Electric.

Standard Features: Engine Enclosure. Low Oil Pressure and High Coolant Temperature Safety Shut Down Switches/Indicators. Autostart Instrument Panel Includes: Tachometer, Voltmeter, Hourmeter, Coolant Temperature Gauge, Oil Pressure Gauge, Manual/Stop/Auto Key Switch, 10 Amp Fuse for Overload Protection, Audible Startup Warning Delay. Muffler and Weather Cap. Pushbutton Throttle Control.

CUMMINS PUBLISHED PERFORMANCE:
 Maximum Gross Continuous BHP
 110 (82 kW) @ 2200 RPM



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.



Specification Data

SECTION 43, PAGE 105

APPROXIMATE DIMENSIONS and WEIGHTS

SKID BASE
NET WEIGHT: 3900 LBS. (1532 KG.)
SHIPPING WEIGHT: 4200 LBS. (1668 KG.)
EXPORT CRATE SIZE: 335 CU. FT. (9,5 CU. M.)

2-WHEEL
 4395 LBS. (1993 KG.)
 4395 LBS. (1993 KG.)

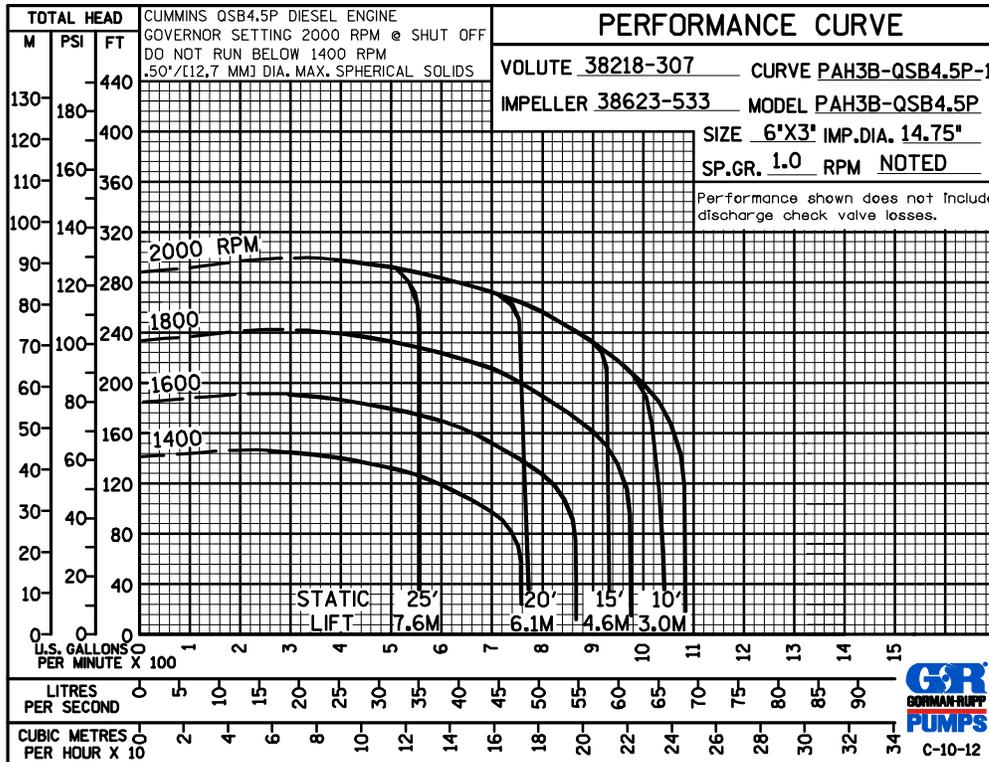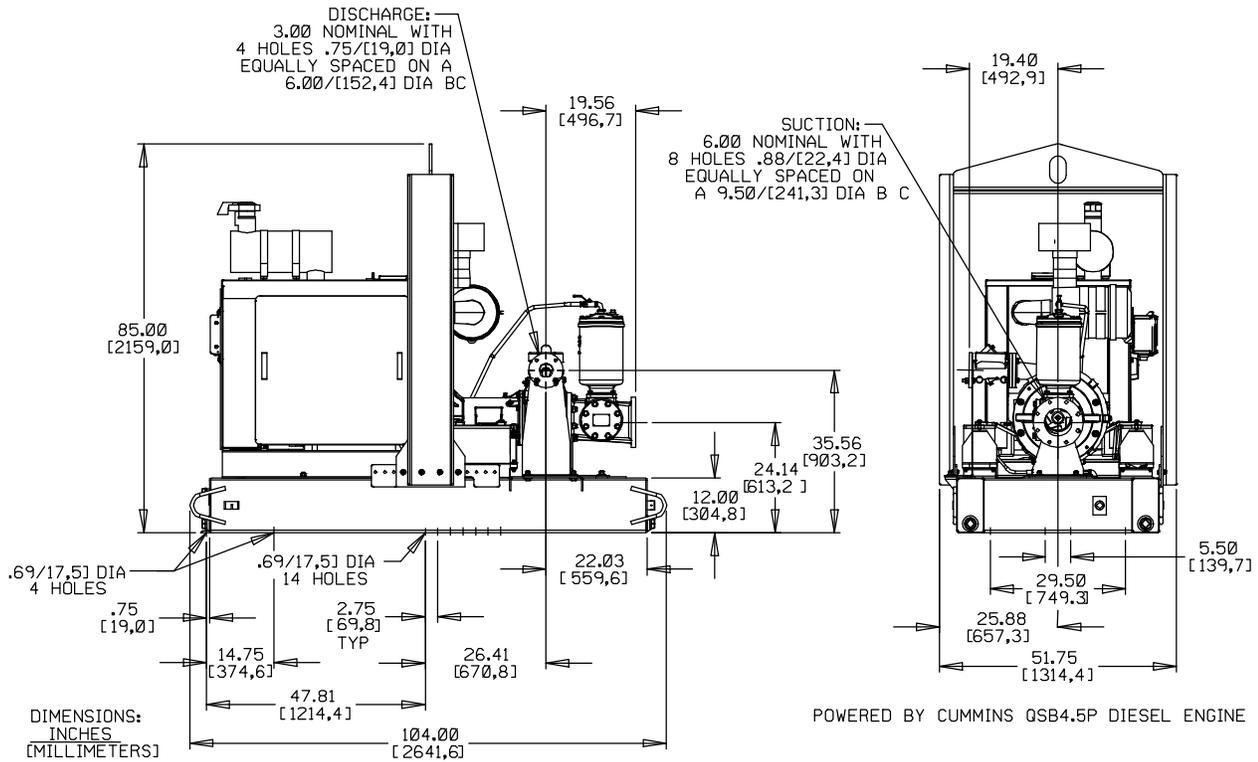

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.