

ACE



Standard Centrifugal Pump

Model 54K2-B

Size 5" x 4"

PUMP SPECIFICATIONS

Size: 5" x 4" (127 mm x 101 mm) Flanged.

Casing: Gray Iron 35.

Maximum Operating Pressure 183 psi (1262 kPa).*

Enclosed Type, Five Vane Impeller: Gray Iron 30.

Handles 1 1/4" (31,8 mm) Diameter Spherical Solids.

Impeller Shaft: Stainless Steel 17-4 PH.

Replaceable Wear Ring: Gray Iron 30.

Pedestal: Gray Iron 30.

Seal Housing: Copper Alloy C90500.

Radial Bearing: Open Single Row Ball.

Thrust Bearing: Open Double Row Ball.

Bearing Lubrication: SAE 30 Non-Detergent Oil.

Cover Plate: Gray Iron 30.

Gaskets: Vegetable Fiber.

Hardware: Standard Plated Steel.

Oil Level Sight Gauge:



Strainer:



Optional Equipment: 5" NPT Suction Flange.

4" NPT Discharge Flange. Hand Primer.

**Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.*

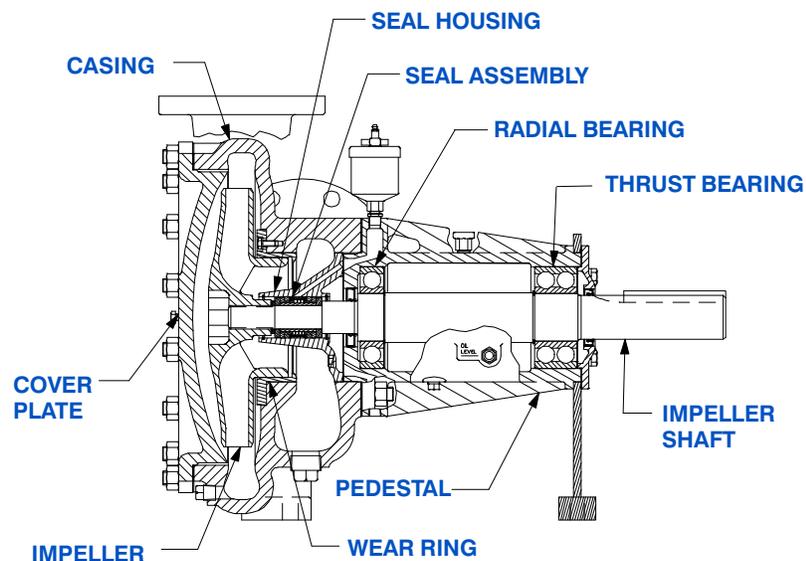

SEAL DETAIL

Double, Grease Lubricated with Spring-Loaded Grease Cup. Sintered Bronze Stationary Seal Seats. Steel Rotating Faces. Neoprene Packing Rings. Maximum Temperature of Liquid Pumped, 110°F (43°C). Maximum Suction Pressure 10 psi (69 kPa).*



THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.

