


Single Stage Centrifugal Pump For Farm Tractor P. T. O. Drive Model 66D2-G

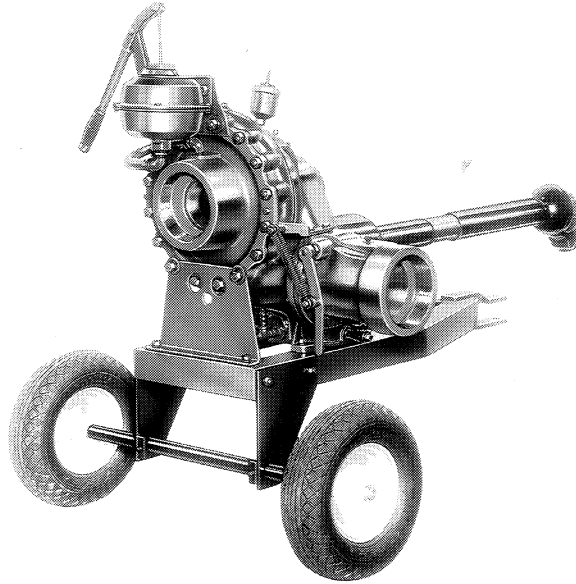

Size: 6" x 6", NPT, female
 Volute casing: Gray iron 30
 (Max. op. press., 290 lbs.)
 Impeller; enclosed, 6 vanes:
 Gray iron 30 (Handles 3/8"
 spherical solids)
 Wear ring, replaceable:
 Bronze 85-5-5-5
 Balance ring: Bronze 85-5-5-5
 Shaft: Hardened steel
 Seal: Double. Grease lubricated
 with spring loaded grease cup
 Suction head: Gray iron 30
 Gear housing: Gray iron 30
 Gears: Helical hardened steel
 increase PTO rpm's 2.636 to 1
 Standard equipment:
 Check valve, automatic lever
 controlled
 Priming, manually operated
 diaphragm pump
 Universal end-guard
 200 lb. pressure gauge
 Strainer
 Pneumatic tires

Adjustable drive shaft with
 universal joints to fit standard
 ASAE-6B PTO 1- 3/8" splined shaft

Unit mounted on two 4.00 x 8
 pneumatic wheels

Frame welded structural steel
 and fitted with tongue for
 attachment to tractor drawbar

Drive attachment fits almost all
 tractors. Those makes with splin-
 ed shaft diameters other than
 1 - 3/8" may be fitted with adapt-
 er, obtainable from tractor dealer.

THE GORMAN-RUPP COMPANY . . . MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED. ST. THOMAS. ONTARIO




SPECIFICATION DATA


Net weight 565 lbs., shipping 620 lbs.

Export size: 27.0 cubic feet

**OVERALL DIMENSIONS
and
WEIGHTS APPROXIMATE**

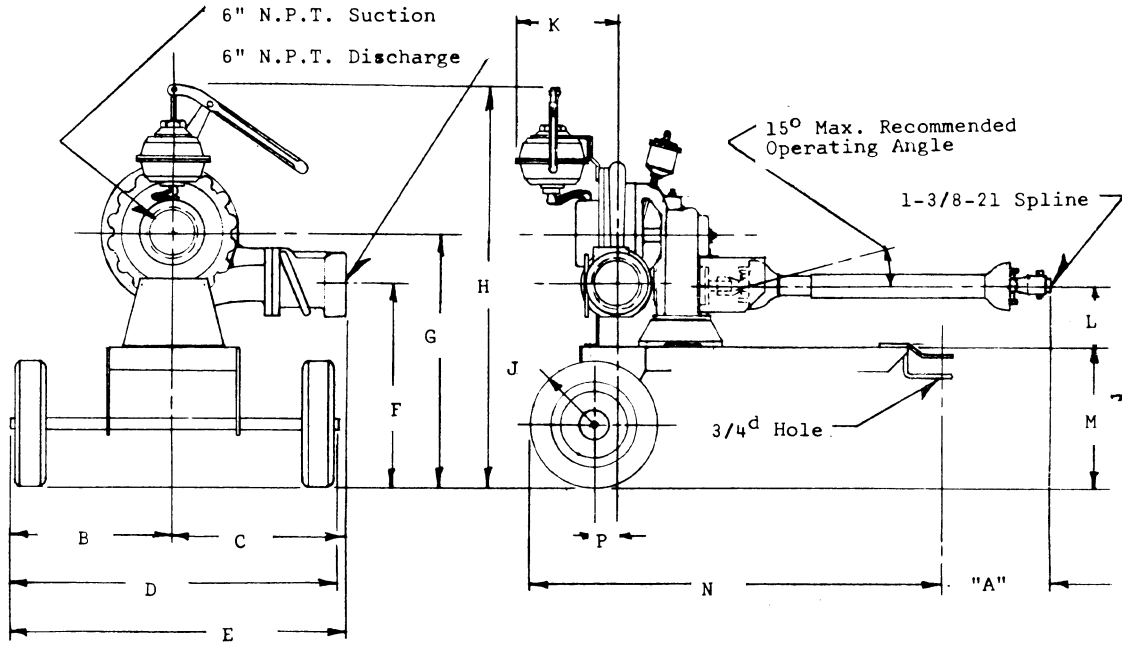

B	C	D	E	F	G	H	J	K	"A" MIN.	"A" MAX.
20-11/16	21-15/16	41-3/8	42-5/8	25-31/32	32-11/32	51-3/16	8	12-13/16	13-3/8	23-3/8
L	M	N	P							
7-31/32	17-7/8	52-1/2	3							

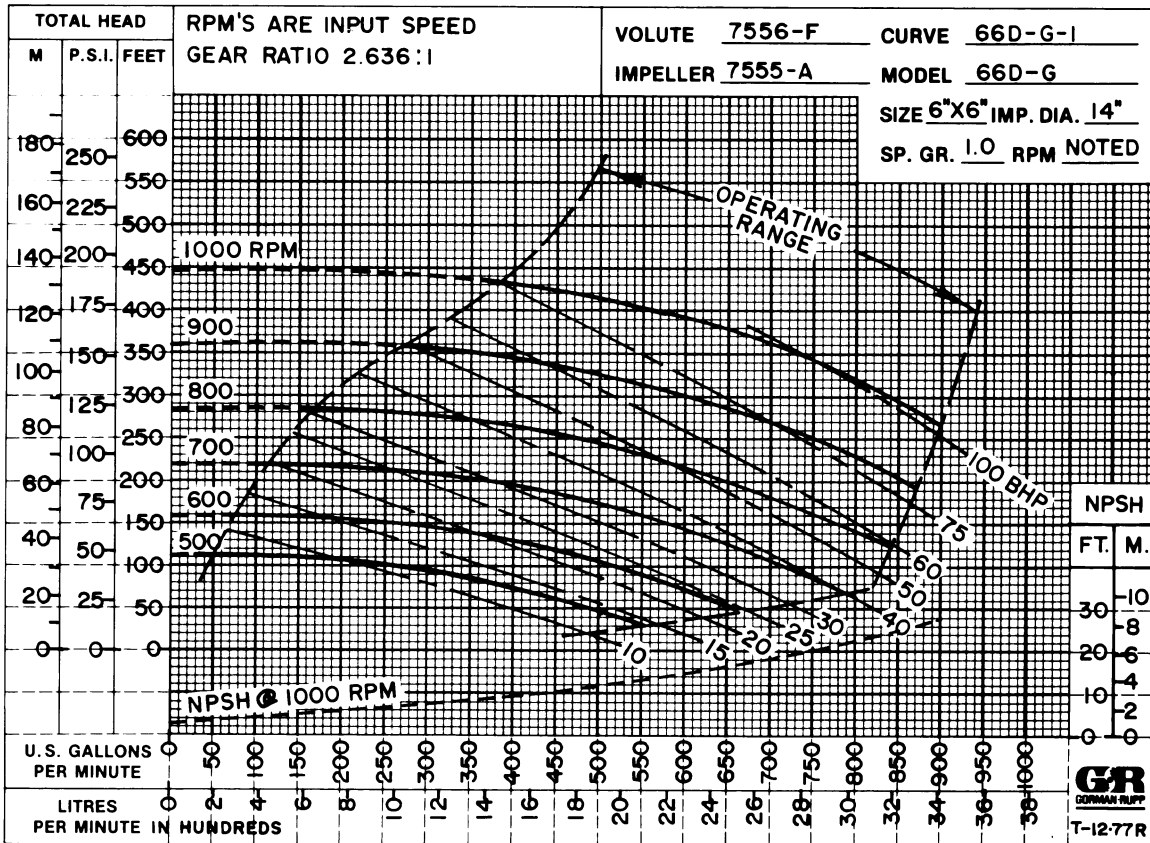

THE GORMAN-RUPP COMPANY ... MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED. ST. THOMAS. ONTARIO

Printed in U. S. A.

