


Single Stage Centrifugal P. T. O. Pump Model 68A-G Size 8" x 8"

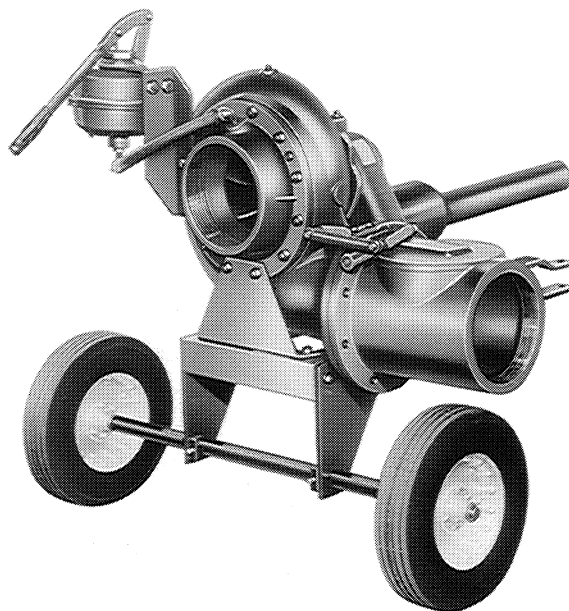

PUMP SPECIFICATIONS



Size: 8" x 8", NPT, female
 Volute: Gray iron, Class 30
 Impeller, open: Gray iron, Class 30
 Wear ring: Bronze
 Suction head: Gray iron, Class 30
 Seal: Double. Grease lubricated w/
 spring loaded grease cup
 Seal liner, replaceable: Brass
 Check valve: Automatic lever controlled
 Priming: Manual, diaphragm pump
 Gears: Helical hardened steel ----
 increase PTO RPM's 2.15:1

- * Adjustable drive shaft with universal joints to fit standard ASAE-6B PTO 1-3/8" splined shaft
 Unit mounted on two 16 x 4.00 semi-pneumatic wheels . 42 7/16" tread.
 Frame welded structural steel and fitted with tongue for attachment to tractor drawbar
- * Drive attachment fits almost all tractors. Those makes with splined shaft diameters other than 1-3/8" may be fitted with adapter, obtainable from tractor dealer.

SPECIFICATION DATA

Weight: Net 640 lbs., shipping 715 lbs.
 Export: Weight 744 lbs., size 46.9 cu. ft.

**OVERALL DIMENSIONS
 and
 WEIGHTS APPROXIMATE**

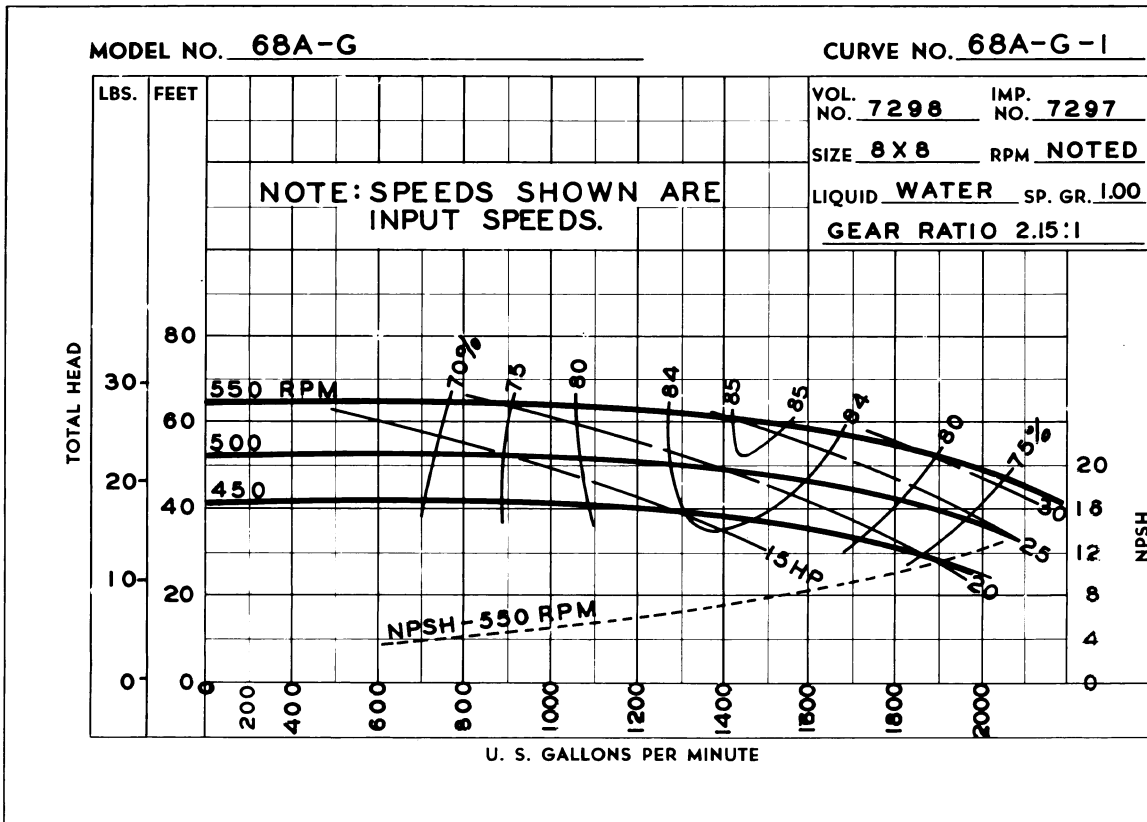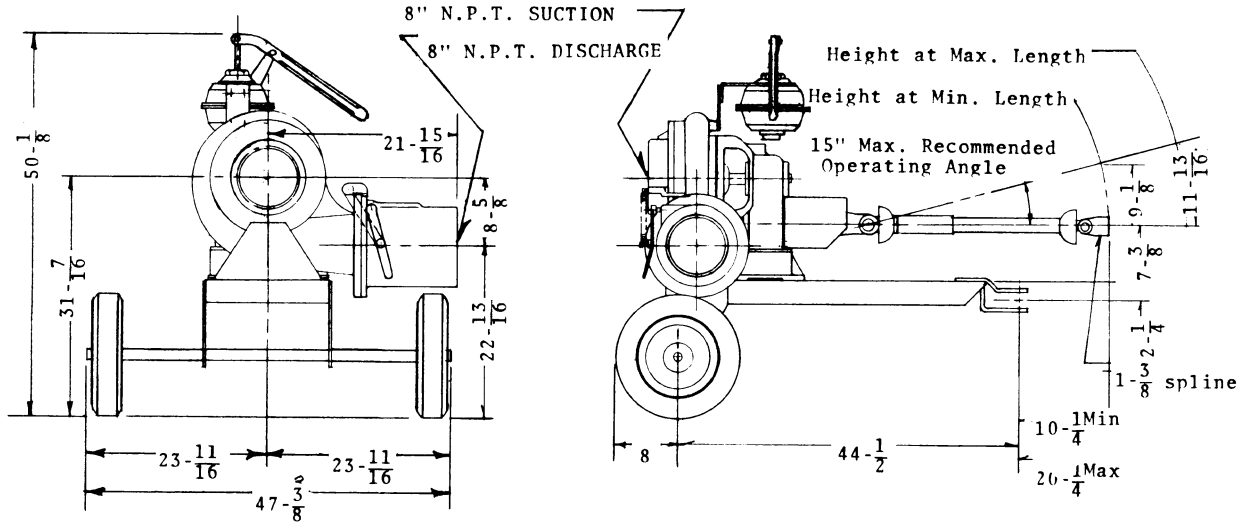

C-12-29-72 REV.

THE GORMAN-RUPP COMPANY . . . MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED. ST. THOMAS. ONTARIO

Printed in U. S. A.

