

c

Electric Motor Driven, Stainless Steel Fitted

Submersible Pump

Model SM4H18-X10

Size 4"



**PUMP SPECIFICATIONS****MSHA PUMP APPROVAL - 2G-3971A-0.****COMMONWEALTH OF PENNSYLVANIA APPROVAL BFE 37-13.****Diffuser:** Stainless Steel CD4MCu,

Maximum Operating Pressure 147 psi (1014 kPa).*

Impeller: Stainless Steel CD4MCu.**Wear Plate:** Stainless Steel CD4MCu.**Plate:** Stainless Steel CD4MCu.**Intermediate:** Aluminum Alloy 356-T6.**Casing:** Aluminum Alloy 6061-T6 with Chromicoat.**Motor Housing:** Aluminum Alloy 356-T6.**Rotor Shaft:** Stainless Steel 416.**Shaft Sleeve:** Stainless Steel 304.**Bearings:** Upper, Two Synthetic Seals, Single Row Ball Bearing.
Lower, Two Synthetic Seals, Double Row Ball Bearing.**Discharge Flange:** Aluminum Alloy 356-T6.**Gaskets:** Cork with Nitrile Binder (NC710).**O-Rings:** Fluorocarbon (DuPont Viton® or Equivalent) and Buna-N.**Wetted Hardware:** Standard Plated Steel and Stainless Steel.**Strainer:** Urethane Coated Steel; 50.6% Open Area,
0.375" (9.5 mm) Diameter Openings.**Hoisting Bail:** Urethane Coated Steel.**Standard Equipment****NEMA Type 10 Explosion Proof Control Box.** Provides On-Off,
Circuit Breaker and Motor Overload Protection.**MSHA Certification - X/P-3026-1.****Optional Equipment**

MSHA-Certified Automatic Control Box, Single Ball Float Switch.**

**Dual Switches and Cable Lengths From 50 to 400 Feet Available.

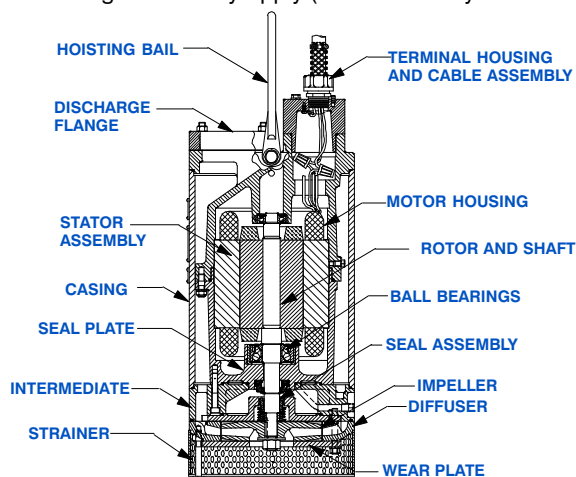Staging Adapter Kit.**MOTOR/CABLE SPECIFICATIONS****Motor:** Air Filled Enclosure; 10.0 H.P.; 3450 R.P.M.; Three Phase;
460/575 Volt, 60 Hz, 17/13.6 Full Load AMPS; 13.45 kW (Max.)**MSHA Approval - 7J-97016-0.****Power Cable:** 7 Wire, Type SPC; (3) 12 AWG Power Conductor,
(2) 14 AWG Control Conductors, (1) 10 AWG Ground Conductor and
(1) 14 AWG Ground Check Conductor. Nominal Length 50 Feet (15 m). Standard.
(Specify Alternate Length at Time of Order.)****** Circuit Breaker Amp Rating and Maximum Combined Length of Motor and
Trailing Cables May Apply (Consult Factory for Details).**SEAL DETAIL**

Tandem, Oil Lubricated.

Upper: Type 22, Mechanical. Cast Iron Rotating Face, and
Carbon Stationary Face. Neoprene and Buna-N
Elastomers. Carbon Steel Spring and Plated Steel Cage.**Lower Seal:** Type 2, Mechanical. Tungsten Titanium
Carbide Rotating Face and Silicon Carbide Stationary
Face. Fluorocarbon Elastomers (DuPont Viton® or
Equivalent). Stainless Steel 303/304 Cage and Spring.

Maximum Temperature of Liquid Pumped, 122°F (50°C).*

* Consult Factory for Applications Exceeding Maximum
Pressure and/or Temperature Indicated.**THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO**

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.



Specification Data

SECTION 132, PAGE 950

APPROXIMATE
DIMENSIONS and WEIGHTS

PUMP & CABLE NET WEIGHT:
CONTROL BOX NET WEIGHT:
GROSS SHIPPING WEIGHT:
EXPORT CRATE:

195 LBS. (88 KG.)
35 LBS. (16 KG.)
241 LBS. (109 KG.)
7.8 CU. FT. (0,22 CU. M.)

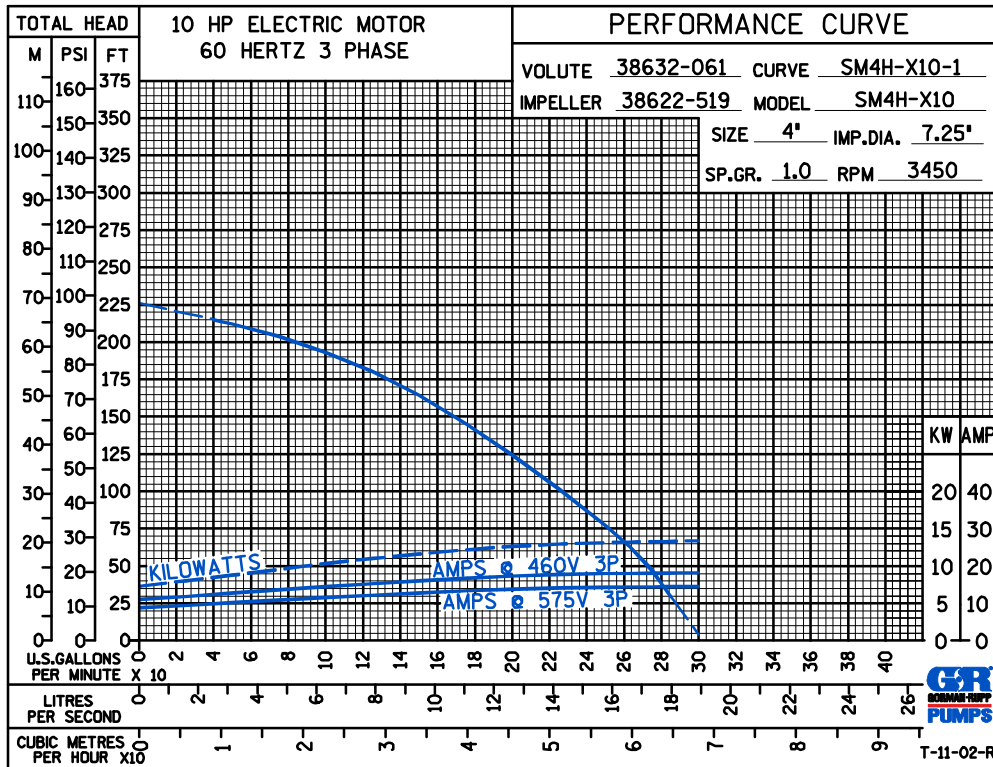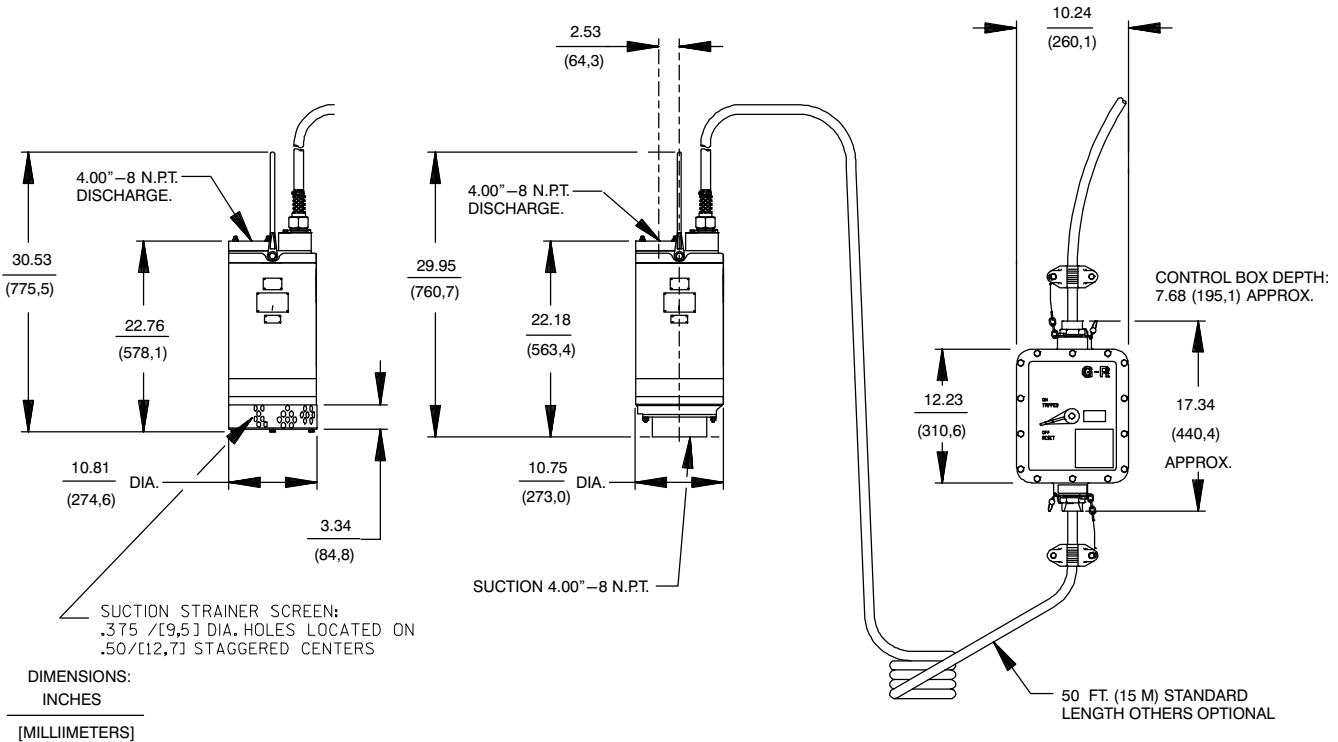

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

Specifications Subject to Change Without Notice

Printed in U.S.A.