Solids Handling Vortex
Hydraulic Motor Driven

Submersible Pump
Model HSV6B31-HYD
Size 6”

PUMP SPECIFICATIONS

Casing: Ductile Iron 65-45-12.
Maximum Operating Pressure 35 psi (241 kPa).*
Impeller: Six Vane Vortex, Stainless Steel CD4MCu.
Handles 5” (127 mm) Diameter Solids.
Wear Plate: Steel ASTM A569.
Wear Ring: Steel ASTM A36.
Bearing Housing: Ductile Iron 65-45-12.
Hydraulic Motor Housing: Ductile Iron 65-45-12.
Shaft: Stainless Steel 17-4PH.
Upper and Lower Bearings: Open Single Row Ball.
Bearing Lubrication: SAE 30 Non-Detergent Oil.
Discharge Flange: Ductile Iron.
O-Rings: Buna-N.
Wetted Hardware: Stainless Steel 18-8.
Standard Equipment:
Strainer/Pump Mounting Stand.
Hoisting Bail.
Hydraulic Motor Input and Output Hoses. 1 Ft. (304,8mm) long with 1.00” NPT Quick Disconnect Fittings.
Maximum Temperature of Liquid Pumped,170°F (77°C).*
(Hydraulic Oil to motor should be cooled)
Optional Equipment:
1.00” (25,4mm) Hydraulic Hose w/Quick Disconnect Fittings.**

* *Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.*

** *Hydraulic Hose Available in 50 Foot (15,2 Meter) Increments: Maximum Recommended Length 150 Feet (45,7 Meters), Specify Length at Time of Order.*

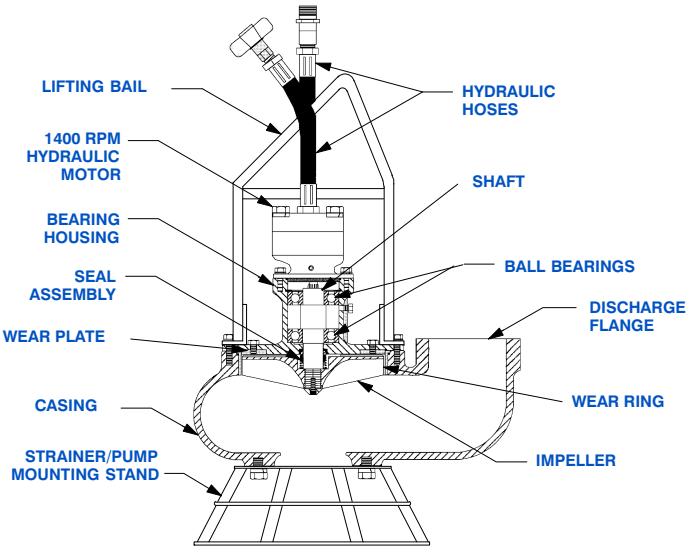

HYDRAULIC MOTOR SPECIFICATIONS

Hydraulic Motor: Variable Speed Gear.
Hose Ports: 1.00” (25,4 mm) NPT.
Operating Pressure: Max. 2900 psi (19995 kPa).
Hydraulic Oil: 214-320 ssu @ 100°F (64°C).
Input Flow: Variable, 15-30 GPM (53-106 LPM).
Power Source: HSP-F4L or Any Open Center Hydraulic System with Flows of 15-30 GPM and Maximum Pressure of 2900 psi (19995 kPa).



SEAL DETAIL

Mechanical, Oil Lubricated. Carbon Rotating Face, Ceramic Stationary Face. Buna-N Elastomers. Stainless Steel 304 Cage and Spring.

© Copyright Gorman-Rupp Pumps 2026

Specification Data	APPROXIMATE DIMENSIONS and WEIGHTS	NET WEIGHT: 250 LBS. (113 KG.)
SECTION 140, PAGE 1050		SHIPPING WEIGHT: 288 LBS. (131 KG.)
		EXPORT CRATE: 14.4 CU. FT. (0,41 CU. M.)

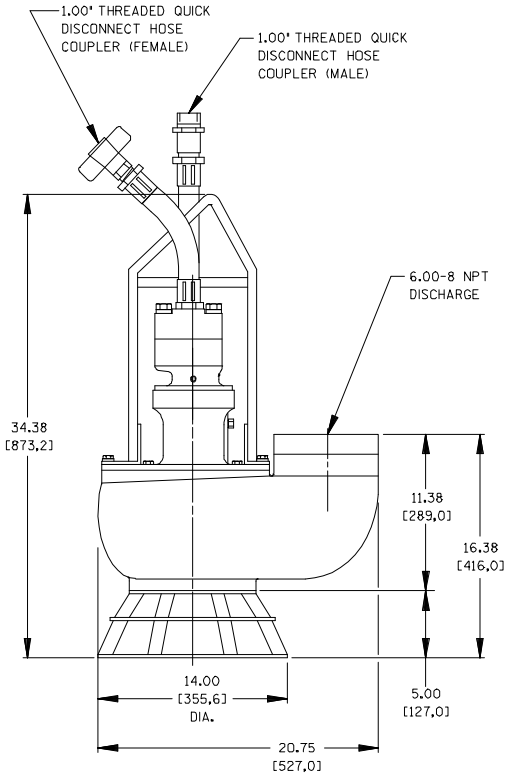

DIMENSIONS:
INCHES
[MILLIMETERS]

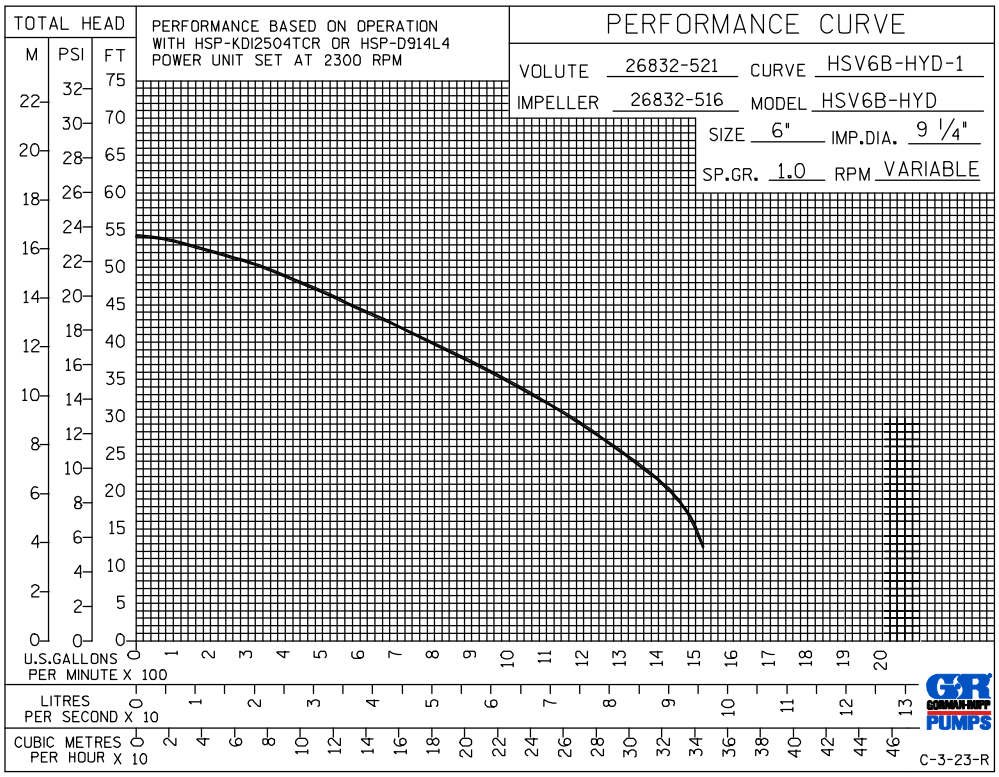

GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.

© Copyright Gorman-Rupp Pumps 2026