


GHS SERIES Flexible Seal HEAVY DUTY STANDARD STEEL ROTARY GEAR PUMP

This heavy duty series pump is ideal for refining, petrochemical and applications requiring extra strength or shock resistance. The steel construction conforms to ASTM designation A216 Grade WCB. Superior rotor shaft support and an integral, maintenance-free radial/thrust bearing, reduce deflection and wear.

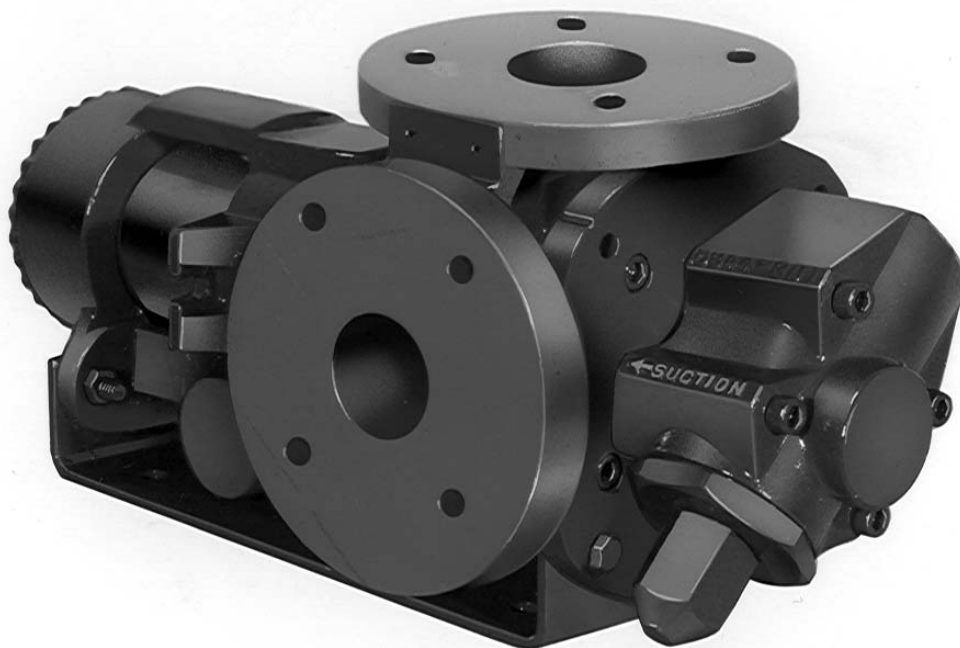

The GHS steel series is designed for applications in the operating ranges noted below. These units are available with head and backhead jackets for temperature control, carbon graphite bushings for low viscosity liquids, silicon carbide bushings for wear resistance, and numerous shaft seal options described on the following pages.

FEATURES

400 PSI CAPABILITY
BALL BEARING THRUST CONTROL
ROTOR END CLEARANCE EXTERNALLY ADJUSTABLE
HIGH STRENGTH, COMPUTER PROFILED GEARING FOR QUIET OPERATION
MULTIPLE PORT POSITIONS
FLEXIBLE SEAL DESIGN ALLOWS FOR A VARIETY OF INDUSTRIAL STANDARD SEALS OR PACKING
INTERNAL SEAL VENT

OPERATING RANGE

CAPACITY (GPM): (3 TO 295)
[LPM] : [11 TO 1116]
PRESSURE (PSI) : [0 TO 300]
[BAR] : [0 TO 21]
VISCOSITY (SSU) : (28 TO 2,000,000)
[cSt] : [1 TO 440,000]
TEMPERATURE (F) : (-20° TO 675°)
[C] : [-29° TO 358°]

APPLICATIONS

USE WITH ANY CLEAN LIQUID COMPATIBLE WITH IRON/STEEL
★ **BOOSTER SERVICE**
★ **CIRCULATING**
★ **FILTERING**
★ **LUBRICATING**
★ **TRANSFERRING**

EXTERIOR	BACKHD	ROTOR & IDLER	HOUSING PORTS	BUSHING	IDLER PIN	SHAFT	SHAFT SEALING		ROTA-TION	INTERNAL RELIEF VALVE	
							MECH. SEAL ●	PACKING ■		MATERIAL	SETTING
STEEL ③	DUCTILE IRON	HIGH STRENGTH IRON	150# FLG GHC 180° GHS 90°	BRONZE	HARD STEEL	STEEL	VITON	CARBON FIBER	C.W.	STEEL	75 PSI [5 BAR]

Standard Models

G H C 3 JG 32 - B
G H S 3 JG 32 - B
 | | | | | | |
 GEAR DUTY DESIGN PORT SIZE HYDRAULIC SEAL STYLE

MODEL NUMBER		NOM. CAPACITY - SPEED				MAXIMUM				SHIPPING DATA				
		MAXIMUM		ALTERNATIVE		DIFF. PRESSURE - PSI [BAR]			TEMP					
		GPM [LPM]	RPM 60 Hz [50 HZ]	GPM [LPM]	RPM 60 Hz [50 HZ]	BELOW 38 SSU [4 cSt]	38 TO 100 SSU [21 cSt]	100 TO 250,000 SSU [55,000 cSt]	°F [°C]	Wt. LBS [KG]	Vol. CU. FT.			
GHC	GHS													
GHC 1 DC32-B ① ● ▮		9 [28]	1750 [1460]	6 [19]	1150 [960]	100 [7]	150 [10]	300 [21]		39 [17,7]	0.6			
GHC 1 DE32-B ① ● ▮		11 [35]		7 [22]						39 [17,7]	0.6			
GHC 1-1/2 GC32-B ● ▮	GHS 1-1/2 GC32-B ● ▮ GHS 1-1/2 GC38-B ■ ▮	16 [50]		10 [32]					GHC ● 350 [177]	71 [32,2]	2.9			
GHC 1-1/2 GF32-B ● ▮	GHS 1-1/2 GF32-B ● ▮ GHS 1-1/2 GF38-B ■ ▮	23 [73]		15 [47]						71 [32,2]	2.9			
GHC 1-1/2 GH32-B ● ▮	GHS 1-1/2 GH32-B ● ▮ GHS 1-1/2 GH38-B ■ ▮	31 [98]		20 [63]						71 [32,2]	2.9			
GHC 1-1/2 GJ32-B ② ● ▮	GHS 1-1/2 GJ32-B ② ● ▮ GHS 1-1/2 GJ38-B ② ■ ▮	38 [120]	1150 [960]	25 [79]	870 [725]			200 [14]	GHS ● 400 [204] ■ 500 [260]	71 [32,2]	2.9			
GHC 3 JG32-B ● ▮	GHS 3 JG32-B ● ▮ GHS 3 JG38-B ■ ▮	40 [126]		30 [95]				300 [21]		154 [69,8]	5.3			
GHC 3 JJ32-B ● ▮	GHS 3 JJ32-B ● ▮ GHS 3 JJ38-B ■ ▮	56 [177]		36 [114]						154 [69,8]	5.3			
GHC 3 JL32-B ● ▮	GHS 3 JL32-B ● ▮ GHS 3 JL38-B ■ ▮	77 [243]		58 [183]						154 [69,8]	5.3			
GHC 3 JP32-B ② ● ▮	GHS 3 JP32-B ② ● ▮ GHS 3 JP38-B ② ■ ▮	107 [338]		81 [256]				200 [14]		154 [69,8]	5.3			

STANDARD MODELS
CONTINUED

NOTE: RECOMMENDED PORT SIZES ARE SHOWN IN **BOLDFACE**. EXAMPLE: **GHC 3 JG32-B, GHS 3 JG32-B**

- MECHANICAL SEAL
- LIPSEAL/PACKING
- ▮ PORTS ARE COMPATIBLE WITH 150# ANSI FLANGES. ALL OTHER PORTS ARE TAPPED NPT FOR ANSI PIPE. OPTIONAL [DIN] FLANGES OR TAPPED [BSP] PORTS AVAILABLE FOR EXPORT MARKET.

- ① 3450 [2875] RPM PERMISSIBLE TO 1,000 SSU [220 cSt] AND 100 PSI [7 BAR]
- ② PUMP LIMITED TO 200 PSI MAXIMUM PRESSURE.
- ③ REFER TO REFERENCE SECTION FOR SPECIFIC CONSTRUCTION DETAILS.

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO
GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

MODEL NUMBER		NOM. CAPACITY - SPEED				MAXIMUM				SHIPPING		
		MAXIMUM		ALTERNATIVE		DIFF. PRESSURE - PSI [BAR]			TEMP.	DATA		
		GPM [LPM]	RPM 60 Hz [50 HZ]	GPM [LPM]	RPM 60 Hz [50 HZ]	BELOW 38 SSU [4 cSt]	38 TO 100 SSU [21 cSt]	100 TO 250,000 SSU [55,000 cSt]	°F [°C]	Wt. LBS [KG]	Vol. CU. FT.	
GHC	GHS											
	GHS 2 NK32-B ● ▮ GHS 2 NK38-B ■ ▮	99 [375]	960 [960]	60 [189]	580 [480]			300 [21]		200 [90,7]	5.3	
	GHS 3 NK32-B ● ▮ GHS 3 NK38-B ■ ▮									200 [90,7]	5.3	
	GHS 2 NM32-B ● ▮ GHS 2 NM38-B ■ ▮	132 [500]		80 [252]						200 [90,7]	5.3	
	GHS 3 NM32-B ● ▮ GHS 3 NM38-B ■ ▮									200 [90,7]	5.3	
	GHS 3 NP32-B ① ● ▮ GHS 3 NP38-B ① ■ ▮	165 [624]		99 [312]				200 [14]		200 [90,7]	5.3	
	GHS 2-1/2 RM32-B ● ▮ GHS 2-1/2 RM38-B ■ ▮	172 [542]		115 [362]				300 [21]		GHS ● 400 [204] ■ 500 [260]	302 [136,9]	10.7
	GHS 3 RM32-B ● ▮ GHS 3 RM38-B ■ ▮										302 [136,9]	10.7
	GHS 4 RM32-B ● ▮ GHS 4 RM38-B ■ ▮										302 [136,9]	10.7
	GHS 2-1/2 RP32-B ● ▮ GHS 2-1/2 RP38-B ■ ▮	215 [678]		143 [451]							302 [136,9]	10.7
	GHS 3 RP32-B ● ▮ GHS 3 RP38-B ■ ▮										302 [136,9]	10.7
	GHS 4 RP32-B ● ▮ GHS 4 RP38-B ■ ▮		302 [136,9]		10.7							
	GHS 3 RR32-B ● ▮ GHS 3 RR38-B ■ ▮	255 [804]	170 [536]	302 [136,9]	10.7							
	GHS 4 RR32-B ● ▮ GHS 4 RR38-B ■ ▮			302 [136,9]	10.7							
	GHS 3 RS32-B ① ● ▮ GHS 3 RS38-B ① ■ ▮	295 [930]	196 [618]	200 [14]	302 [136,9]	10.7						
	GHS 4 RS32-B ① ● ▮ GHS 4 RS38-B ① ■ ▮				302 [136,9]	10.7						

STANDARD MODELS
CONTINUED

- MECHANICAL SEAL
- LIPSEAL/PACKING
- ▮ PORTS ARE COMPATIBLE WITH 150# ANSI FLANGES. ALL OTHER PORTS ARE TAPPED NPT FOR ANSI PIPE. OPTIONAL [DIN] FLANGES OR TAPPED [BSP] PORTS AVAILABLE FOR EXPORT MARKET.


① PUMP LIMITED TO 200 PSI MAXIMUM PRESSURE.

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

APPLICATION RECOMMENDATIONS:		
APPLICATION	OPTIONS REQUIRED (Select One From Each Row)	OPERATING LIMITATIONS
GHS ONLY HIGH TEMPERATURE	25U, 25V, OR 25W 35J – 35M (AS REQ'D) 40M, 40W 61H, OR 65Q 70K	TEMPERATURE: 675° F MAX. PRESSURE: 200 PSI MAX.
ASPHALT	35J–35M (AS REQ'D) 40M, 40W, 40G 41R, 41W 65S 70, 70K, 71K	TEMPERATURE: 500° MAX.
JACKETED	40G, 40J, 40K, 40W, 41U, 41W	LIMIT JACKET PRESSURE TO 150 PSIG

NOTE: PROPER PUMP APPLICATION REQUIRES CONSIDERATION OF ADDITIONAL FACTORS. PLEASE REVIEW APPLICATION GUIDE IN SECTION 500 OR CONSULT THE FACTORY.

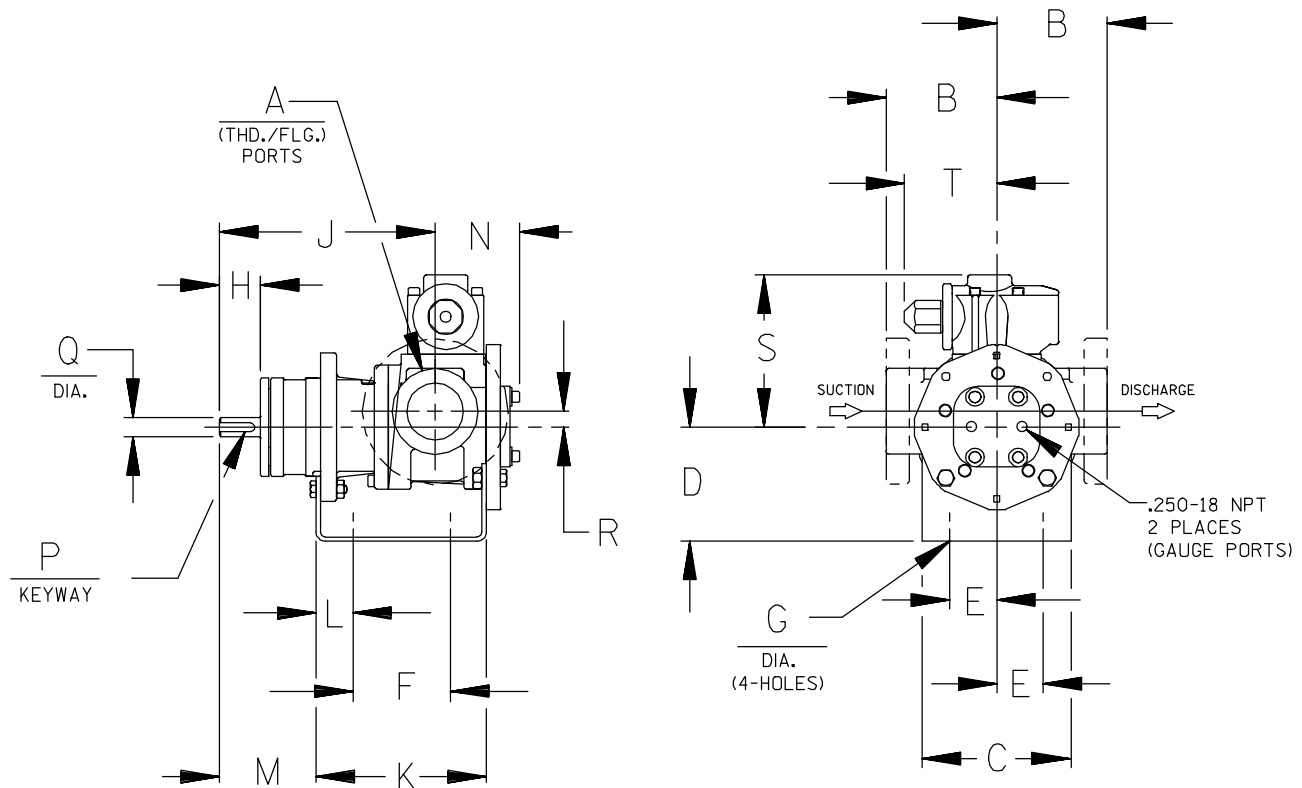

CAD FILE NO.: 16458D

MODEL NUMBERS	PUMP DIMENSIONS - INCHES [MILLIMETERS]																	
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
GHC D	1"	4.00 [102]	4.00 [102]	3.50* [89] 4.50 [114] 5.25 [133]	1.62 [41]	3.12 [79]	.41 [10]	1.16 [30]	6.19 [157]	5.04 [128]	.76 [19]	2.62 [66]	2.74 [70]	.12 [3] x .75 [19]	.50 [13]	.62 [16]	5.19 [132]	3.58 [91]
GHC G	1-1/2"	4.00 [102]	5.88 [149]	3.50* [89] 4.50 [114] 5.25 [133] 6.25 [159]	1.62 [41]	4.00 [102]	.41 [10]	1.62 [41]	8.50 [216]	6.71 [170]	1.06 [27]	3.82 [97]	3.35 [85]	.19 [5] x 1.25 [32]	.75 [19]	.62 [16]	6.00 [152]	3.62 [92]
GHC J	3"	6.00* [152] 6.31 [160]	6.88 [175]	4.50 [114] 5.25* [133] 6.25 [159] 7.00 [178] 8.00 [203]	2.88 [73]	4.25 [108]	.44 [11]	2.50 [64]	12.12 [308]	9.75 [248]	1.75 [44]	5.50 [140]	4.66 [118]	.25 [6] x 2.00 [51]	1.00 [25]	1.12 [28]	9.06 [230]	6.75 [171]


* STANDARD DIMENSION
 PORTS ARE COMPATIBLE WITH 150# OR 300# ANSISTEEL FLANGES. ALL OTHER PORTS ARE TAPPED NPT
 † FOR ANSI PIPE. OPTIONAL [DIN] FLANGES OR TAPPED [BSP] PORTS AVAILABLE FOR EXPORT MARKET.
 NPT FOR ANSI PIPE. OPTIONAL (DIN) FLANGES OR TAPPED (BSP) PORTS AVAILABLE FOR EXPORT MARKET.
 ‡ 90° HOUSING

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

SUPERSEDES ALL PREVIOUS ISSUES

©2010 The Gorman-Rupp Company

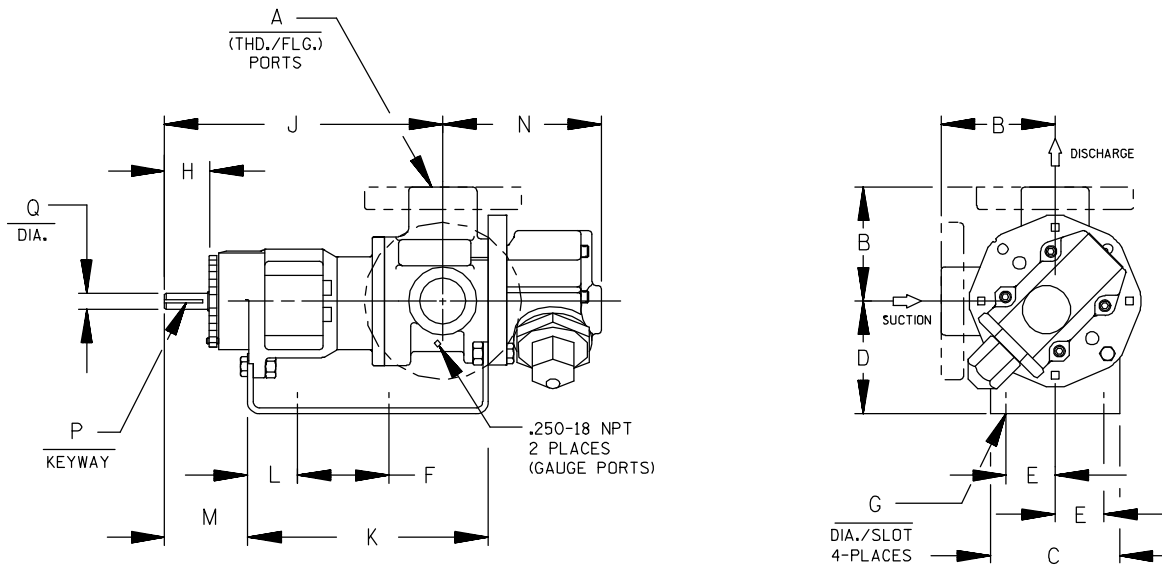

CAD FILE NO.: 16669F

MODEL NUMBERS	PUMP DIMENSIONS - INCHES [MILLIMETERS]														
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
GHS G	1-1/2"	4.00 [102]	4.88 [124]	3.50 [89] * 4.50 [114] 5.25 [133] 6.25 [159]	1.62 [41]	8.00 [203]	.41 [10] 1.62 [41]	1.62 [41]	12.06 [306] 10.72 [272]	10.72 [272]	1.52 [39] 3.35 [85]	3.35 [85]	5.70 [145]	.19 [5] x 1.25 [32]	.75 [19]
GHS J	3"	6.00 † [152] 6.31 [160]	6.88 [175]	5.25 [133] * 6.25 [159] 7.00 [178] 8.00 [203]	2.88 [73]	10.00 [254]	.44 [11] 2.50 [64]	2.50 [64]	15.68 [398] 14.31 [363]	14.31 [363]	2.77 [70] 4.48 [114]	4.48 [114]	8.50 [216]	.25 [6] x 2.00 [51]	1.00 [25]
GHS N	2"	5.25 [133] * 5.38 [137]	8.00 [203]	4.50 [114] 5.25 [133] * 6.25 [159] 7.00 [178] 8.00 [203]	2.88 [73]	10.00 [254]	.44 [11] 2.58 [66]	2.58 [66]	16.37 [416] 15.14 [385]	15.14 [385]	2.69 [68] 4.56 [116]	4.56 [116]	7.59 [193] 8.72 [221] *	.25 [6] x 2.00 [51]	1.12 [32]
	3"	7.19 [183]													
GHS R	2-1/2"														
	3"	7.19 [183]	10.50 [267]	7.00 [178]	3.75 [95] 13.75 [349]	.52 [13] 2.25 [57]	2.25 [57]	17.87 [454] 17.36 [441]	17.36 [441]	1.80 [46] 4.70 [119]	4.70 [119]	11.31 [287]	.38 [10] x 1.88 [48]	1.44 [37]	
	4"														

* STANDARD DIMENSION

† PORTS ARE COMPATIBLE WITH 150* OR 300* ANSI STEEL FLANGES. ALL OTHER PORTS ARE TAPPED NPT FOR ANSI PIPE. OPTIONAL (DIN) FLANGES OR TAPPED (BSP) PORTS AVAILABLE FOR EXPORT MARKET.

† 180° HOUSING

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

GHC/GHS

FOR GHC DRIVE OPTIONS

AND DIMENSIONS

SEE


SECTION 540

FOR GHS DRIVE OPTIONS

AND DIMENSIONS

SEE

SECTION 545



PERFORMANCE CURVES

SPEED VS. CAPACITY/HORSEPOWER



JJ

Hydraulic
Size

SEC. 500

Page 68


January 2010

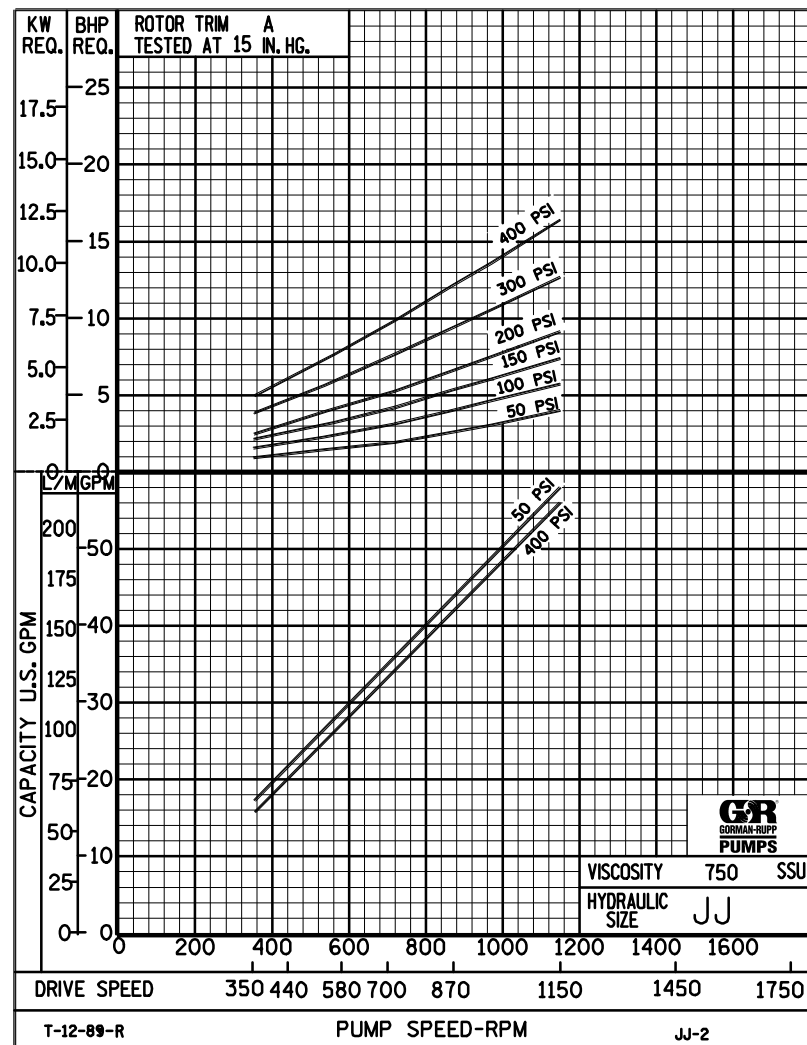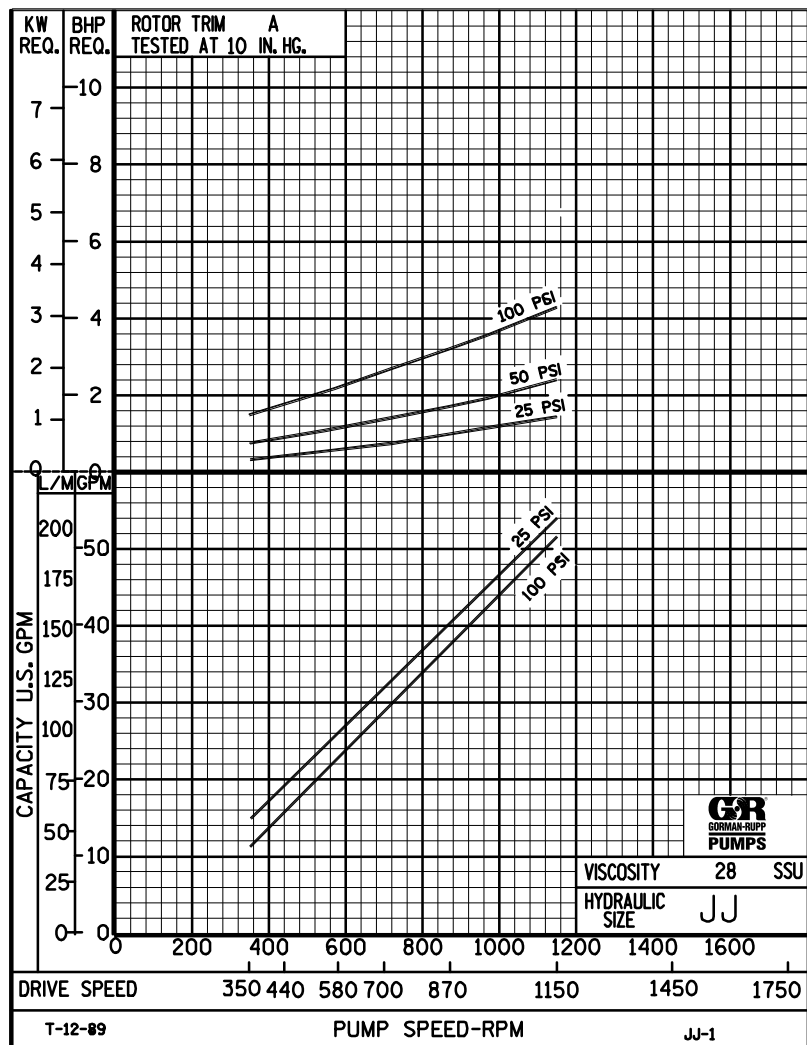

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO

GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

Printed in U.S.A.



PERFORMANCE CURVES

SPEED VS. CAPACITY/HORSEPOWER



JJ

Hydraulic
Size

SEC. 500

Page 69


January 2010

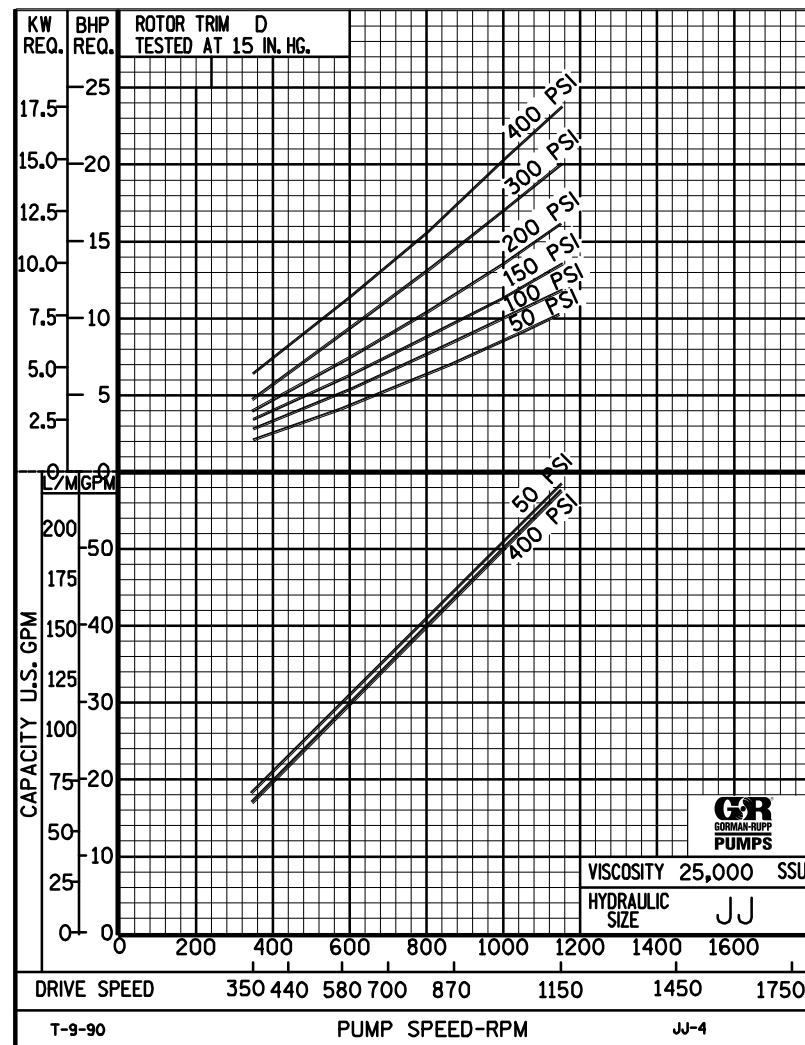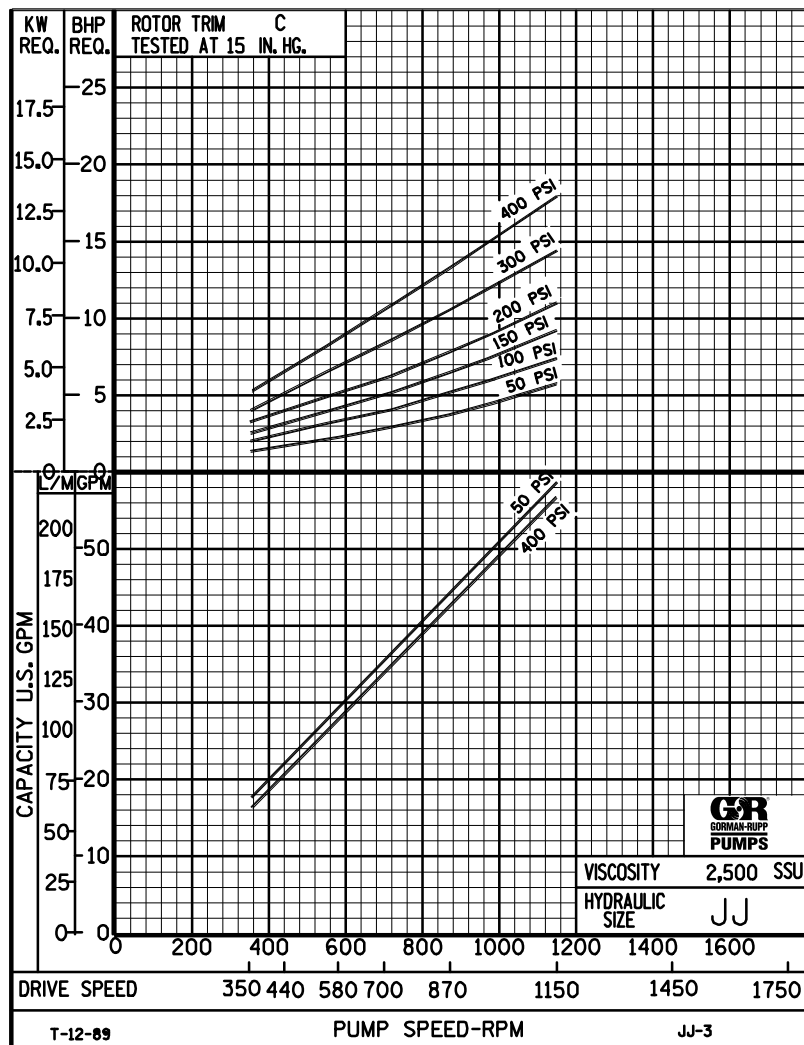

THE GORMAN-RUPP COMPANY • MANSFIELD, OHIO


GORMAN-RUPP OF CANADA LIMITED • ST. THOMAS, ONTARIO, CANADA

Printed in U.S.A.




NOMINAL		ROTOR TRIM	VISCOSITY	N.I.P.R.	FRICTION PIPE LOSS (PSI/FT) (Based on Sch 40 Steel Pipe)					FULL BYPASS RELIEF VALVE PRESSURE (PSI)					CAPACITY (GPM)				H.P. REQUIRED								
			(SSU)	(PSIA)	PIPE DIAMETER					CRACKING PRESS. (PSI)					DIFFERENTIAL PRESSURE (PSI)												
										LOW PRES R/V			HI PRES R/V		25	50	75	100	150	200	300	400					
CAP. GPM	SPEED RPM				1½"	2"	2½"	3"	4"	50	75	100	150	200	HEAVY DUTY												
56	1150	STD	28	4.0	.01	.01	.01	.01	.01	62	87	114			54	52	52	51									
			32		.07	.02	.01	.01	.01						1.0	2.4	3.3	4.3									
			38	4.0	.09	.03	.01	.01	.01	62	89	116	166			55	54	53	53	51							
			50		.11	.03	.02	.01	.01							1.6	2.5	3.5	4.4	6.4							
			70	4.0	.13	.04	.02	.01	.01	63	90	118	167	219	56	55	55	54	53	52							
			100		.15	.05	.02	.01	.01						1.8	2.7	3.6	4.6	6.5	8.7							
			150	4.0	.16	.05	.02	.01	.01	64	91	120	167	219	57	56	56	55	54	54	53	52					
			200		.18	.05	.02	.01	.01						2.1	3.0	3.9	4.8	6.6	8.7	12	16					
			300	4.0	.20	.06	.03	.01	.01	65	92	122	168	220	57	57	57	56	56	55	55	54					
			500		.25	.09	.05	.02	.01						2.8	3.6	4.6	5.4	7.1	9.0	13	16					
			750	4.0	.37	.14	.07	.03	.01	66	93	124	168	220	58	58	57	57	57	57	56	56					
			1,000		.49	.18	.09	.04	.02						3.2	4.0	4.9	5.7	7.4	9.2	13	16					
		2,000	4.3	.98	.36	.18	.08	.03	70	95	124	168	222	58	58	58	58	58	57	57	56						
		3,500		1.72	.63	.31	.13	.05						4.6	5.7	6.6	7.4	9.2	11	14	18						
		5,000	4.5	2.45	.90	.44	.19	.06	72	97	126	170	224	59	58	58	58	58	58	57	57						
		7,500		3.68	1.35	.67	.28	.10						6.6	7.3	8.0	8.8	11	13	16	20						
		10,000	4.7	4.90	1.81	.89	.37	.13	74	99	128	172	226	59	58	58	58	58	58	57	57						
		15,000		7.35	2.71	1.33	.56	.19						8.8	9.0	10	11	13	15	18	2.0						
		20,000	4.9	9.80	3.61	1.77	.74	.25	78	103	128	174	226	58	58	58	58	58	58	57	57						
		25,000		12.3	4.51	2.22	.93	.31						9.7	10	11	12	14	16	20	24						
		50,000	6.9	24.5	9.02	4.43	1.86	.63	82	107	132	178	230	58	58	58	58	58	58	57	57						
		75,000		-	-	-	-	-						15	16	16	18	19	22	25	30						
		100,000																									
		150,000																									
		200,000																									
		250,000																									

(NOTE) For speeds not shown on the pump hydraulic charts, consult factory.



NOMINAL		ROTOR TRIM	VISCOSITY	N.I.P.R.	FRICTION PIPE LOSS (PSI/FT) (Based on Sch 40 Steel Pipe)					FULL BYPASS RELIEF VALVE PRESSURE (PSI)					CAPACITY (GPM) / H.P. REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
															DIFFERENTIAL PRESSURE (PSI)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
CAP. GPM	SPEED RPM		(SSU)	(PSIA)	PIPE DIAMETER					CRACKING PRESS. (PSI)					25	50	75	100	150	200	300	400																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
										LOW PRES R/V	HI PRES R/V		MEDIUM DUTY AND HEAVY DUTY					HEAVY DUTY ONLY																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
					1½"	2"	2½"	3"	4"	50	75	100	150	200																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															</

(NOTE) For speeds not shown on the pump hydraulic charts, consult factory.



JJ

PUMP HYDRAULIC SIZE CHART

SEC. 500


Page 72

January 2010

**28 GPM
580 RPM**

NOMINAL		ROTOR TRIM	VISCOSITY	N.I.P.R.	FRICTION PIPE LOSS (PSI/FT) (Based on Sch 40 Steel Pipe)					FULL BYPASS RELIEF VALVE PRESSURE (PSI)					CAPACITY (GPM)				H.P. REQUIRED					
			(SSU)	(PSIA)	PIPE DIAMETER					CRACKING PRESS. (PSI)					DIFFERENTIAL PRESSURE (PSI)									
CAP. GPM	SPEED RPM				1½"	2"	2½"	3"	4"	50	75	100	150	200	25	50	75	100	150	200	300	400		
															MEDIUM DUTY AND HEAVY DUTY					HEAVY DUTY ONLY				
28	580	STD	28	1.7	.01	.01	.01	.01	.01	54	80	111			26	25	25	24						
			32		.02	.01	.01	.01	.01						.61	1.2	1.7	2.2						
			38	1.7	.03	.01	.01	.01	.01	54	80	111	157		26	26	26	25	24					
			50		.03	.01	.01	.01	.01						.64	1.2	1.7	2.2	3.4					
			70	1.7	.04	.01	.01	.01	.01	54	81	111	157	209	27	27	26	26	25	24				
			100		.05	.02	.01	.01	.01						.69	1.2	1.8	2.2	3.4	4.2				
			150	1.7	.05	.02	.01	.01	.01	54	81	111	157	209	28	28	27	27	26	26	25	25		
			200		.05	.02	.01	.01	.01						.77	1.3	1.8	2.3	3.4	4.2	6.0	7.9		
			300	1.7	.08	.03	.01	.01	.01	55	82	111	157	209	28	28	28	27	27	27	26	26		
			500		.12	.05	.02	.01	.01						.90	1.5	1.9	2.4	3.4	4.2	6.0	7.9		
			750	1.7	.19	.07	.03	.02	.01	55	82	111	157	209	29	28	28	28	28	28	27	27		
			1,000		.25	.09	.05	.02	.01						1.3	1.8	2.2	2.7	3.5	4.3	6.3	8.1		
			2,000	2.1	.49	.18	.09	.04	.01	57	84	113	157	209	29	29	29	28	28	28	28	27		
			3,500		.86	.32	.16	.07	.02						2.2	2.6	3.1	3.5	4.4	5.3	7.2	9.0		
		"C"	5,000	2.4	1.23	.45	.22	.09	.03	59	86	115	158	210	29	29	29	29	28	28	28	28		
			7,500		1.84	.68	.33	.14	.05						2.8	3.2	3.6	4.1	5.0	5.9	7.8	9.6		
			10,000	2.7	2.45	.90	.44	.19	.06	61	88	118	159	211	29	29	29	29	29	29	28	28		
			15,000		3.68	1.35	.67	.28	.10						3.3	3.7	4.2	4.7	5.6	6.6	8.5	10		
			20,000	3.0	4.90	1.81	.89	.37	.13	64	91	121	159	211	30	29	29	29	29	29	29	28		
			25,000		6.13	2.26	1.11	.47	.16						3.7	4.2	4.7	5.1	6.2	7.1	9.0	11		
			50,000	4.6	12.3	4.51	2.22	.93	.31	67	94	124	162	214	30	29	29	29	29	29	29	28		
			75,000		18.4	6.76	3.32	1.40	.47						5.6	6.2	6.7	7.4	8.0	9.6	11	14		
			100,000	6.6	24.5	9.02	4.43	1.86	.63	71	98	128	166	218	30	29	29	29	29	29	29	28		
			150,000		36.8	13.5	6.65	2.79	.94						7.0	7.8	8.4	9.3	9.6	12	13	16		
			200,000	10.0	49.0	18.0	8.86	3.72	1.25	74	101	131	169	221	30	29	29	29	29	29	29	28		
			250,000		-	-	-	-	-						8.4	9.4	9.9	11	11	13	15	17		

(NOTE) For speeds not shown on the pump hydraulic charts, consult factory.



NOMINAL		ROTOR TRIM	VISCOSITY	N.I.P.R.	FRICTION PIPE LOSS (PSI/FT) (Based on Sch 40 Steel Pipe)					FULL BYPASS RELIEF VALVE PRESSURE (PSI)					CAPACITY (GPM) / H.P. REQUIRED																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
															DIFFERENTIAL PRESSURE (PSI)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
CAP. GPM	SPEED RPM		(SSU)	(PSIA)	PIPE DIAMETER					CRACKING PRESS. (PSI)					25	50	75	100	150	200	300	400																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
							LOW PRES R/V		HI PRES R/V			MEDIUM DUTY AND HEAVY DUTY					HEAVY DUTY ONLY																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
				1½"	2"	2½"	3"	4"	50	75	100	150	200																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											</

(NOTE) For speeds not shown on the pump hydraulic charts, consult factory.



JJ

8 GPM
150 RPM

(NOTE) For speeds not shown on the pump hydraulic charts, consult factory.